



Describing Simple Data Access Services Version 1.0

IVOA Proposed Recommendation 17 May 2012

This version:

<http://www.ivoa.net/Documents/SimpleDALRegExt/20120517/>

Latest version:

<http://www.ivoa.net/Documents/SimpleDALRegExt/>

Previous versions:

WD: <http://www.ivoa.net/Documents/SimpleDALRegExt/20110921/>

Authors:

[Raymond Plante](#), Editor,
[Jesus Delago](#),
[Paul Harrison](#),
[Doug Tody](#),
and the [IVOA Registry Working Group](#)

Abstract

An application that queries or consumes descriptions of VO resources must be able to recognize a resource's support for standard IVOA protocols. This specification describes how to describe a services that supports four fundamental data access protocols--Simple Cone Search (SCS), Simple Image Access (SIA), Simple Spectral Access (SSA), Simple Line Access (SLA)--using the VOResource XML encoding standard. A key part of this specification is the set of VOResource XML extension schemas that define new metadata that are specific to those protocols. This document describes in particular rules for describing such services within the context of IVOA Registries and data discovery as well as the VO Standard Interface (VOSI) and service self-description. In particular, this document spells out the essential mark-up needed to identify support for a standard protocol and the base URL required to access the interface that supports that protocol.

Status of this document

This is an IVOA Proposed Recommendation available for public review by all interested parties. Comments on this document should be made via the IVOA Request For Comment (RFC) Twiki page, <http://www.ivoa.net/cgi-bin/twiki/bin/view/IVOA/SimpleDALRegExt10RFC> or by via email to registry@ivoa.net. The deadline comments can be found on the [RFC page](#).

Early versions of this document were known as [RegSimpleDAL](#). The short name is now [SimpleDALRegExt](#).

A list of [current IVOA Recommendations and other technical documents](#) can be found at <http://www.ivoa.net/Documents/>.

Acknowledgements

This document has been developed with support from the [National Science Foundation's](#) Information Technology Research Program under Cooperative Agreement AST0122449 with The Johns Hopkins University, from the [UK Particle Physics and Astronomy Research Council \(PPARC\)](#), and from the [European Commission's Sixth Framework Program](#) via the [Optical Infrared Coordination Network \(OPTICON\)](#).

Conformance-related definitions

The words "MUST", "SHALL", "SHOULD", "MAY", "RECOMMENDED", and "OPTIONAL" (in upper or lower case) used in this document are to be interpreted as described in IETF standard, RFC 2119 [\[RFC 2119\]](#).

The **Virtual Observatory (VO)** is general term for a collection of federated resources that can be used to conduct astronomical research, education, and outreach. The [International Virtual Observatory Alliance \(IVOA\)](#) is a global collaboration of separately funded projects to develop standards and infrastructure that enable VO applications.

XML document **validation** is a software process that checks that an XML document is not only well-formed XML but also conforms to the syntax rules defined by the applicable schema. Typically, when the schema is defined by one or more XML Schema [\[schema\]](#) documents (see [next section](#)), validation refers to checking for conformance to the syntax described in those Schema documents. This document describes additional syntax constraints that cannot be enforced solely by the rules of XML Schema; thus, in this document, use of the term validation includes the extra checks that goes beyond common Schema-aware parsers which ensure conformance with this document.

Syntax Notation Using XML Schema

The eXtensible Markup Language, or XML, is document syntax for marking textual information with named tags and is defined by the World Wide Web Consortium (W3C) Recommendation, [XML 1.0 \[XML\]](#). The set of XML tag names and the syntax rules for their use is referred to as the document schema. One way to formally define a schema for XML documents is using the W3C standard known as XML Schema [\[schema\]](#).

This document defines the VOResource schema using XML Schema. The full Schema document is listed in [Appendix A](#). Parts of the schema appear within the main sections of this document; however, documentation nodes have been left out for the sake of brevity.

Reference to specific elements and types defined in the VOResource schema include the namespaces prefix, `vr`, as in `vr:Resource` (a type defined in the VOResource schema). Reference to specific elements and types defined in the VODataService extension schema include the namespaces prefix, `vs`, as in `vs:ParamHTTP` (a type defined in the VODataService schema). Use of the `vs` prefix in compliant instance documents is strongly recommended, particularly in the applications that involve IVOA Registries (see [R], section 3.1.2). Elsewhere, the use is not required.

Contents

[Abstract](#)

[Status of this document](#)

[Acknowledgments](#)

[Conformance-related definitions](#)

[Syntax Notation Using XML Schema](#)

[1. Introduction](#)

[1.1. The Role in the IVOA Architecture](#)

[1.2. Dependencies on Other Standards](#)

[2. The Common Data Model for Simple DAL Services](#)

[3. Describing Standard Capabilities](#)

[3.1. Simple Cone Search](#)

[3.2. Simple Image Access](#)

[3.3. Simple Spectral Access](#)

[3.4. Simple Line Access](#)

[Appendix A: the XML Schemas](#)

[A.1. ConeSearch XML Schema](#)

[A.2. SIA XML Schema](#)

[A.3. SSA XML Schema](#)

[A.4. SLAP XML Schema](#)

[Appendix B: Supporting Multiple Versions of DAL Protocols](#)

[Appendix C: Change History](#)

[References](#)

1. Introduction

Four data access service protocols play a key role in discovering data in the VO:

- **Simple Cone Search** [[SCS](#)] -- searches a catalog for sources or observations that are within a given distance of a sky position.
- **Simple Image Access** [[SIA](#)] -- searches an archive for images that overlap a given region of sky.
- **Simple Spectral Access** [[SSA](#)] -- searches an archive for spectra of positions within a given region of sky.
- **Simple Line Access** [[SLA](#)] -- searches a catalog specializing in descriptions of spectral line transitions.

They are called "simple" because a typical query can be formed using only a few search parameters encoded into a URL (i.e. an HTTP GET request). Their power for data discovery comes from the ability of an application to form a single query according to the rules of one of these

protocols and send it to *all known services which support that protocol*. The results collected from all those services, in effect then, represent all matching data of that type known to the VO. Thus, the key for an application wishing to do a comprehensive search of the VO is to discover all of the services that support the particular standard protocol.

Service discovery in the VO is done via a *searchable registry* [RI]—i.e., a searchable repository of descriptions of resources in VO. These descriptions are comprised of common standard metadata [RM] that capture information about what a resource contains or does and who provides it. A standard registry encodes these descriptions using the VOResource XML Schema [VOR]. Service resources in particular include *capability metadata* that describe the functionality it supports along with *interface metadata* that describe how to access that functionality. It is within the capability metadata that it is possible to indicate support for a particular standard protocol.

Capability metadata play an important role beyond just identifying support for a standard interface. More generally, they describe how the service behaves, and if applications are to make use of this information in an automated way, the behavior must be described using standardized metadata. In general, the metadata necessary for describing that behavior will be specific to the particular kind of service. In the case of a standard protocol, in which it is common that some variation in behavior is allowed while still being in compliance, it can be important to an application to know *how* a service complies with the standard for two reasons:

1. The application may wish to search for and select services that support a particular protocol feature. For example, an application may wish to find image services that can create cut-outs on-the-fly.
2. The application may wish to plan its use of the service according its limitations, such as the maximum region of sky that can be search in one query.

It is important to note that the relevant behavioral differences between separate services that support a common protocol—and thus the metadata used to describe those behaviors—will be specific to that protocol. That is, the ability to create image cut-outs is irrelevant to the Simple Cone Search protocol. Consequently, it is necessary to define *protocol-specific metadata* to adequately describe a service's support for that protocol. This document defines such capability metadata for SCS, SIA, SSA, and SLA.

This document describes, for each of the standard data access protocols—SCS, SIA, SSA, and SLA—precisely how to describe a service that supports one of the protocol using the VOResource XML encoding standard [VOR]. This specification is intended to be applicable wherever VOResource records are used, but in particular, it is intended as the standard for encoding resource descriptions within an IVOA-compliant registry [RI] and for encoding capability metadata available through the VO Standard Interface [VOSI].

1.1. The Role in IVOA Architecture

The IVOA Architecture [Arch] provides a high-level view of how IVOA standards work together to connect users and applications with providers of data and services, as depicted in the diagram in Fig. 1.

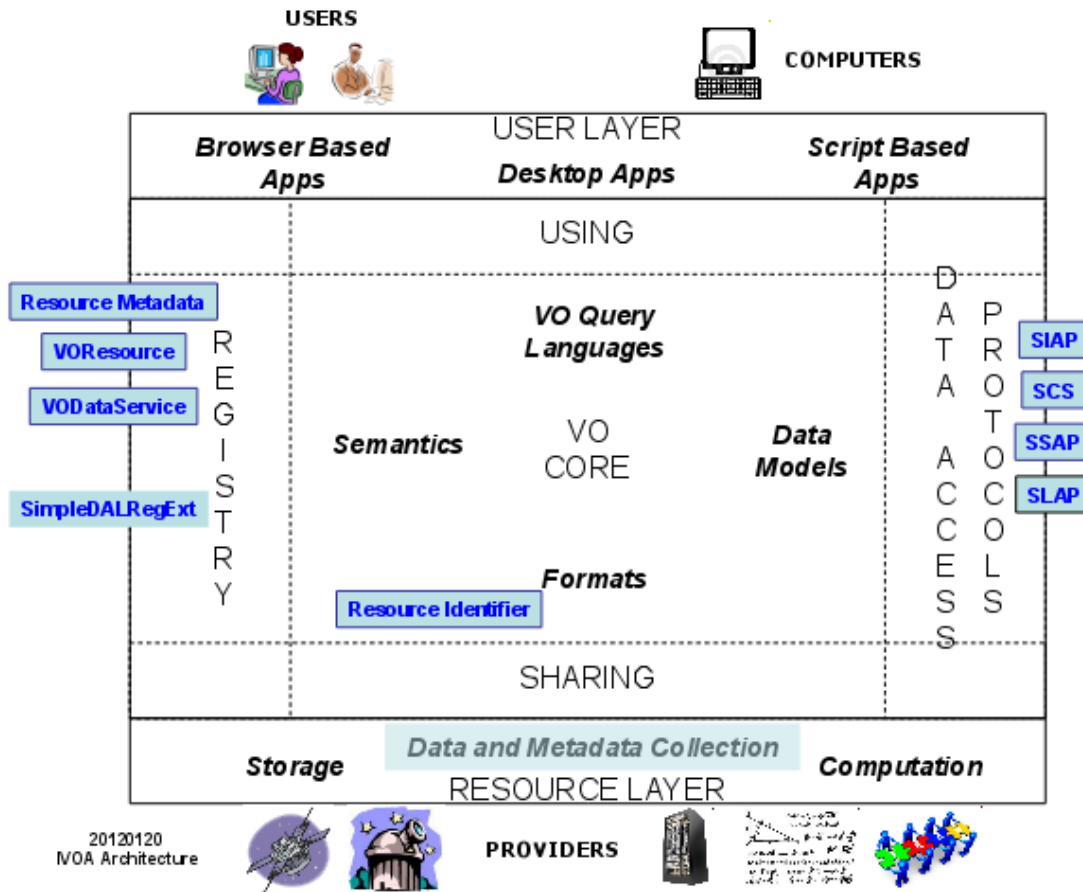


Figure 1. SimpleDALExt in the IVOA Architecture. The Registry enables applications in the User Layer to discover archives in the Resource Layer and the services they provide for accessing data, particularly those that support the standard data access protocols like SIAP, SCS, SSAP, and SLAP (illustrated on the right). The registry metadata model standards (in blue text and boxes on the left) give structure to the information that enables that discovery. In particular, the SimpleDALExt standard defines the metadata used to describe standard data access services of the types listed on the right.

In this architecture, data access protocols provide the means for users (via the User Layer) to access data from archives. Of particular importance are the standard protocols, SCS, SIA, SSA, and SLA, which allow a generic user tool to find data in any archive that supports those protocols. Registries provide to tools in the User Layer a means to discover which archives support the standard protocols. A registry is a repository of descriptions of resources, such as standard services, that can be searched based on the metadata in those descriptions.

Resource descriptions have a well-defined structure: the core concepts are defined in the Resource Metadata standard [RM], and the format is defined by the VOResource XML standard [VOR]. Additional metadata specialized to describe a specific kind of service are defined via extensions to the VOResource core XML Schema. SimpleDALExt is one such extension specifically for describing SCS, SIA, SSA, and SLA services in the registry.

1.2. Dependencies on Other Standards

This specification relies directly on other IVOA standards in the following ways:

VOResource, v1.03 [VOR]:

Descriptions of services that support the standard protocols are encoded using the VOResource XML Schema. The protocol-specific schemas defined in this document are extensions of the VOResource core schema.

Simple Cone Search, v1.03 [SCS],

Simple Image Access, v1.0 [SIA],

Simple Spectral Access, v1.04 [SSA],

Simple Line Access, v1.0 [SLA]:

Each protocol specification describes the metadata concepts that should be included in a description of a service that supports the specification.

VODataService, v1.1 [VDS]:

The interface to the standard protocol functionality is described with a specialized Interface type, `vs:ParamHTTP`, which is defined in the VODataService XML Schema, an extension to VOResource. This document also recommends describing the service using VODataService resource type, `vs:CatalogDataService`.

Except where noted in subsequent sections, this specification does not imply support for any other versions (including later versions) than the ones noted above.

This specification refers to other IVOA standards:

Registry Interfaces, v1.0 [RI]:

A registry that is compliant with both this specification and the Registry Interfaces standard will encode service resource descriptions according to the recommendations in this document.

IVOA Standard Interface, v1.0 [VOSI]:

A service that supports one of the target protocols as well as the capability metadata retrieval method defined by VOSI [VOSI, section 2.1] is compliant with this specification if the capability metadata are encoded according the recommendations in this document.

Unlike with the previously mentioned specifications, this specification may apply to later versions of the RI and VOSI standards.

2. The Common Data Model for Simple DAL Services

This section describes common requirements for describing the target DAL services as VOResource records.

To be recognized as a service, the DAL service resource must be described as a resource type of `vr:Service` (defined in the VOResource schema [VOR]) or one of its legal sub-types. As specified in the VOResource specification [VOR], the resource type is set by setting the `xsi:type` attribute on the element representing the root of the VOResource record to the namespace-qualified resource type name. As the DAL services respond to queries with tables of available data products, the resource should set the resource type to `vs:CatalogService` (defined in the VODataService extension schema [VDS]). In this case, record authors are encouraged to include a full description of the columns in the table returned in query response (assuming full verbosity). The `vs:CatalogService` resource type also allows the record to provide sky coverage information which

authors are also encouraged to provide; an exception to this would be for pure SLA services as the spectral line catalogs they serve are not strictly sky observations.

Note:

In the future, a more appropriate resource type may be defined for describing DAL services; thus, the loose requirement on the resource type allows for this. At the time of this writing, the `vs:CatalogService` is recommended as the most appropriate type and represents current practice with IVOA registries.

The VOResource record must include a `<capability>` element that describes the services support for the DAL protocol. The contents of the element is described in the [next section](#). In all cases, the value of the `<capability>` element's `standardID` unambiguously identifies the service's support for the particular DAL protocol. The resource may include other `<capability>` elements to describe support for other protocols.

The `<capability>` element describing support for the DAL protocol must include a child `<interface>` element that describes support for the required DAL interface; the `xsi:type` attribute on that element must be set to `vs:ParamHTTP`, and the `role` attribute must be set to "std". A `<accessURL>` element within that `<interface>` must be set to the base URL, as defined in the DAL protocol specification, that provides access to the standard DAL protocol. It is not necessary to provide the `use` attribute to the `<accessURL>` element (as its value can be assumed); however, when it is provided, it must be set to "base". Similarly, it is not necessary to provide the `<interface>` element with `<queryType>` or `<resultType>` elements; however, when provided, their values should be "GET" and "application/x-votable+xml", respectively. The `vs:ParamHTTP` allows one to describe input parameters supported by the service; description authors are encouraged to list the optional parameters and any custom parameters supported by the instance of the service.

A sample interface description for a simple DAL service.

```
<interface xsi:type="vs:ParamHTTP" role="std">
  <accessURL use="base">
    http://adil.ncsa.uiuc.edu/cgi-bin/voimquery?survey=f&
  </accessURL>

  <!-- here is a standard, optional parameter -->
  <param use="optional" std="true">
    <name>CFRAME</name>
    <description>request to shift to a given coordinate frame.</description>
    <dataType>string</dataType>
  </param>

  <!-- here is a site-specific parameter that this service supports -->
  <param use="optional" std="false">
    <name>FREQ</name>
    <description>Frequency of observation.</description>
    <unit>Hz</unit>
    <dataType>real</dataType>
  </param>
</interface>
```

3. Describing Standard Capabilities

This section describes the specific VOResource metadata extension schemas used to describe support for the target DAL protocols. The purpose of these schemas are to provide the

`vr:Capability` sub-type that identifies the specific protocol. These are defined employing the recommendations for `vr:Capability` extensions given in the VOResource standard [VR]. In particular, each extension schema have the following features:

- The namespace associated with the extension is a URI that is intended to resolve an HTTP URL to XML Schema document that defines the extension schema. This means that VOResource document authors may use this URI as the location URL within the value of `xsi:schemaLocation` attribute.

Note:

The IVOA Registry Interface standard [R] actually *requires* that the VOResource records it shares with other registries provide location URLs via `xsi:schemaLocation` for the VOResource schema and all legal extension schemas that are used in the records. This rule would apply to the extension schemas defined in this standard.

- A particular namespace prefix is recommended for use when referring to the specialized `vr:Capability` sub-type defined in the schema. Generally instance documents may use any prefix; however, in applications where common and consistent use of prefixes is recommended (such as with the Registry Interface specification [R]), use of the prefixes recommended in this document can be used.
- The schema sets `elementFormDefault="unqualified"`. This means that it is not necessary to qualify element names defined in the schema with a namespace prefix (as there are no global elements defined). The only place it is usually needed is as a qualifier to a `Capability` sub-type name given as the value of an `xsi:type` attribute on the `<capability>` element (see the examples in the subsections below).
- The definition of the specialized `vr:Capability` sub-type fixes the value its `standardID` attribute to the URI that is intended to uniquely identify the standard DAL protocol whose support the type describes.
- The specialized `vr:Capability` sub-type includes a `<testQuery>` element for encoding parameters that together can be used to test the service. The format for encoding the individual parameters is customized for each of the four simple services covered in this specification.

Note:

It is also possible to encode test queries as part of the `vs:ParamHTTP` interface via its `<testQuery>` element [VDS]; this query is encoded as a single string that can be appended to the service's base URL. This specification does not recommend one over the other. Use of the `vr:Capability`-based `<testQuery>` pre-dates the `vs:ParamHTTP`-based one and has been kept for backward-compatibility purposes. It might be easier for some clients to use since each parameter is individually tagged and perhaps easier to parse, manipulate, and enter automatically into an interface. The `vs:ParamHTTP`-based one has an advantage in that it can be applied to any REST-like service, standard or not.

3.1. Simple Cone Search

This section describes the ConeSearch VOResource metadata extension schema which is used to describe services that comply with the Simple Cone Search protocol [SCS].

3.1.1. The Schema Namespace

The namespace associated with the ConeSearch extension schema is "http://www.ivoa.net/xml/ConeSearch/1.0". The namespace prefix, `cs`, should be used in applications where common use of prefixes improves interoperability (e.g. in the IVOA registries [RI]). Furthermore, we use the `cs` prefix in this document to refer to types defined as part of the ConeSearch extension schema.

3.1.2. ConeSearch

The `cs:ConeSearch` type is `vr:Capability` sub-type that should be used to describe a service's support for the Simple Cone Search protocol [SCS]; it is defined as follows:

cs:ConeSearch Type Schema Definition:

(Note that the purpose of type `csCapRestriction` is to fix the value of `standardID`.)

```
<xs:complexType name="CSCapRestriction" abstract="true" >
  <xs:complexContent >
    <xs:restriction base="vr:Capability" >
      <xs:sequence >
        <xs:element name="validationLevel" type="vr:Validation"
          minOccurs="0" maxOccurs="unbounded" />
        <xs:element name="description" type="xs:token" minOccurs="0" />
        <xs:element name="interface" type="vr:Interface"
          minOccurs="0" maxOccurs="unbounded" />
      </sequence>
      <xs:attribute name="standardID" type="vr:IdentifierURI" use="required"
        fixed="ivo://ivoa.net/std/ConeSearch" />
    </restriction>
  </complexContent>
</complexType>

<xs:complexType name="ConeSearch" >
  <xs:complexContent >
    <xs:extension base="cs:CSCapRestriction" >
      <xs:sequence >
        <xs:element name="maxSR" type="xs:float" />
        <xs:element name="maxRecords" type="xs:int" />
        <xs:element name="verbosity" type="xs:boolean" />
        <xs:element name="testQuery" type="cs:Query" />
      </sequence>
    </extension>
  </complexContent>
</complexType>
```

The `cs:CSCapRestriction` is defined to fix the value of the `standardID` attribute; thus, all uses of the `cs:ConeSearch` type must set `standardID` to "ivo://ivoa.net/std/ConeSearch". Because the `cs:CSCapRestriction` is marked as abstract, instance documents can not use it directly as a value for the `xsi:type` attribute.

The custom metadata that the `sia:ConeSearch` type provides is given in the table below. For the

elements whose semantics map directly to service profile metadata called for in the SCS standard [[SCS](#), section 3], there is an entry labeled "SCS Name"; this indicates the metadata name given in the SCS specification that the element in this schema corresponds to. The profile metadata listed in the SCS specification that is not covered by the elements below are covered by other metadata that are part of the core VOResource schema.

cs:ConeSearch Extension Metadata Elements	
Element	Definition
maxSR	<p>SCS Name: MaxSR</p> <p>Value type: floating-point number: <code>xs:float</code></p> <p>Semantic Meaning: The largest search radius, in degrees, that will be accepted by the service without returning an error condition.</p> <p>Occurrences: required</p> <p>Comments: Use 180.0 if there is no restriction.</p>
maxRecords	<p>SCS Name: MaxRecords</p> <p>Value type: integer: <code>xs:int</code></p> <p>Semantic Meaning: The largest number of records that the service will return.</p> <p>Occurrences: required</p>
verbosity	<p>SCS Name: Verbosity</p> <p>Value type: boolean (true/false): <code>xs:boolean</code></p> <p>Semantic Meaning: True if the service supports the VERB keyword; false, otherwise.</p> <p>Occurrences: required</p>
testQuery	<p>Value type: composite: cs:Query</p> <p>Semantic Meaning: A query that will result in at least one matched record that can be used to test the service.</p> <p>Occurrences: required</p> <p>Comments: The value should be false if the all values of the VERB input parameter results in the same set of columns being returned.</p>

3.1.2.1 testQuery and the Query Type

The `<testQuery>` element is intended to help other VO components (e.g. registries, validation services, services that monitor the VO's operational health—but typically not end users) test that the service is up and operating correctly. It provides a set of legal input parameters that should return a legal response that includes at least matched record. Since this query is intended for testing purposes, the size of the result set should be small.

The `cs:Query` type captures the different components of the query into separate elements, as defined below:

cs:Query Type Schema Definition

```
<xs:complexType name="Query" >
  <xs:sequence >
    <xs:element name="ra" type="xs:double" />
    <xs:element name="dec" type="xs:double" />
    <xs:element name="sr" type="xs:double" />
    <xs:element name="verb" type="xs:positiveInteger" minOccurs="0" />
    <xs:element name="catalog" type="xs:string" minOccurs="0" />
    <xs:element name="extras" type="xs:string" minOccurs="0" />
  </sequence>
</complexType>
```

The individual sub-elements are defined as follows:

cs:Query Metadata Elements	
Element	Definition
ra	<p><i>Value type:</i> floating-point number: <code>xs:double</code></p> <p><i>Semantic Meaning:</i> the right ascension of the search cone's center in decimal degrees.</p> <p><i>Occurrences:</i> required</p>
dec	<p><i>Value type:</i> floating-point number: <code>xs:double</code></p> <p><i>Semantic Meaning:</i> the declination of the search cone's center in decimal degrees.</p> <p><i>Occurrences:</i> required</p>
sr	<p><i>Value type:</i> floating-point number: <code>xs:double</code></p> <p><i>Semantic Meaning:</i> the radius of the search cone in decimal degrees.</p> <p><i>Occurrences:</i> required</p>
verb	<p><i>Value type:</i> positive integer: <code>xs:positiveInteger</code></p> <p><i>Semantic Meaning:</i> the verbosity level to use where 1 or less means the bare minimum set of columns and 3 or more means the full set of available columns.</p> <p><i>Occurrences:</i> optional</p>
catalog	<p><i>Value type:</i> string: <code>xs:string</code></p> <p><i>Semantic Meaning:</i> the catalog to query.</p> <p><i>Occurrences:</i> optional</p> <p><i>Comments:</i> When the service can access more than one catalog, this input parameter, if available, is used to indicate which service to access.</p>
extras	<p><i>Value type:</i> string: <code>xs:string</code></p> <p><i>Semantic Meaning:</i> any extra (non-standard) parameters that must be provided (apart from what is part of base URL given by the <code>accessURL</code> element).</p> <p><i>Occurrences:</i> optional</p> <p><i>Comments:</i> this value should be in the form of name=value pairs delimited with ampersands (&).</p>

3.2. Simple Image Access

This section describes the SIA VOResource metadata extension schema which is used to describe services that comply with the Simple Image Access protocol [SIA].

3.2.1. The Schema Namespace

The namespace associated with the SIA extension schema is "http://www.ivoa.net/xml/SIA/1.0". The namespace prefix, `sia`, should be used in applications where common use of prefixes improves interoperability (e.g. in the IVOA registries [RI]). Furthermore, we use the `sia` prefix in this document to refer to types defined as part of the SIA extension schema.

3.2.2. SimpleImageAccess

The `sia:SimpleImageAccess` type is a `vr:Capability` sub-type that should be used to describe a service's support for the Simple Image Access protocol [SIA]; it is defined as follows:

sia:SimpleImageAccess Type Schema Definition

(Note that the purpose of type `sia:CapRestriction` is to fix the value of `standardID`.)

```
<xs:complexType name="SIACapRestriction" abstract="true" >
  <xs:complexContent >
    <xs:restriction base="vr:Capability" >
      <xs:sequence >
        <xs:element name="validationLevel" type="vr:Validation"
          minOccurs="0" maxOccurs="unbounded" />
        <xs:element name="description" type="xs:token" minOccurs="0" />
        <xs:element name="interface" type="vr:Interface"
          minOccurs="0" maxOccurs="unbounded" />
      </sequence>
      <xs:attribute name="standardID" type="vr:IdentifierURI" use="required"
        fixed="ivo://ivoa.net/std/SIA" />
    </restriction>
  </complexContent>
</complexType>

<xs:complexType name="SimpleImageAccess" >
  <xs:complexContent >
    <xs:extension base="sia:SIACapRestriction" >
      <xs:sequence >
        <xs:element name="imageServiceType" type="sia:ImageServiceType" />
        <xs:element name="maxQueryRegionSize" type="sia:SkySize" />
        <xs:element name="maxImageExtent" type="sia:SkySize" />
        <xs:element name="maxImageSize" type="sia:ImageSize" />
        <xs:element name="maxFileSize" type="xs:int" />
        <xs:element name="maxRecords" type="xs:int" />
        <xs:element name="testQuery" type="sia:Query" minOccurs="0" maxOccurs="1" />
      </sequence>
    </extension>
  </complexContent>
</complexType>
```

The `sia:SIACapRestriction` is defined to fix the value of the `standardID` attribute; thus, all uses of the `sia:SimpleImageAccess` type must set `standardID` to "ivo://ivoa.net/std/SIA". Because the `cs:SIACapRestriction` is marked as abstract, instance documents can not use it directly as a value for the `xsi:type` attribute.

The custom metadata that the `sia:SimpleImageAccess` type provides is given in the table below. For the elements whose semantics map directly to metadata called for in the SIA standard [SIA, section 7], there is an entry labeled "SIA Name"; this indicates the metadata name given in the SIA specification that the element in this schema corresponds to.

sia:SimpleImageAccess Extension Metadata Elements									
Element	Definition								
imageServiceType	<p>SIA Name: Type.ImageService</p> <p>Value type: string with controlled vocabulary</p> <p>Semantic Meaning: The category of image service as defined by [SIA], section 3.</p> <p>Occurrences: required</p> <p>Allowed Values:</p> <table border="0"> <tr> <td style="padding-right: 20px;">Cutout</td> <td>an Image Cutout Service, as defined in [SIA], section 3 (see Note below).</td> </tr> <tr> <td>Mosaic</td> <td>an Image Mosaicing Service, as defined in [SIA], section 3 (see Note below).</td> </tr> <tr> <td>Atlas</td> <td>an Atlas Image Archive, as defined in [SIA], section 3 (see Note below).</td> </tr> <tr> <td>Pointed</td> <td>a Pointed Image Archive, as defined in [SIA], section 3 (see Note below).</td> </tr> </table>	Cutout	an Image Cutout Service, as defined in [SIA], section 3 (see Note below).	Mosaic	an Image Mosaicing Service, as defined in [SIA], section 3 (see Note below).	Atlas	an Atlas Image Archive, as defined in [SIA], section 3 (see Note below).	Pointed	a Pointed Image Archive, as defined in [SIA], section 3 (see Note below).
Cutout	an Image Cutout Service, as defined in [SIA], section 3 (see Note below).								
Mosaic	an Image Mosaicing Service, as defined in [SIA], section 3 (see Note below).								
Atlas	an Atlas Image Archive, as defined in [SIA], section 3 (see Note below).								
Pointed	a Pointed Image Archive, as defined in [SIA], section 3 (see Note below).								
maxQueryRegionSize	<p>SIA Name: MaxQueryRegionSize</p> <p>Value type: composite: sia:SkySize</p> <p>Semantic Meaning: The maximum image query region size, expressed in decimal degrees. A value of 360 degrees indicates that there is no limit and the entire data collection (entire sky) can be queried.</p> <p>Occurrences: required</p>								
maxImageExtent	<p>SIA Name: MaxImageExtent</p> <p>Value type: composite: sia:SkySize</p> <p>Semantic Meaning: The maximum image query region size, expressed in decimal degrees. A value of 360 degrees indicates that there is no limit and the entire data collection (entire sky) can be requested.</p> <p>Occurrences: required</p>								
maxImageSize	<p>SIA Name: MaxImageSize</p> <p>Value type: composite: sia:ImageSize</p> <p>Semantic Meaning: The largest image (in terms of pixels) that can be requested.</p> <p>Occurrences: required</p>								
maxFileSize	<p>SIA Name: MaxFileSize</p> <p>Value type: integer: <code>xs:int</code></p> <p>Semantic Meaning: The maximum image file size in bytes.</p> <p>Occurrences: required</p>								

maxRecords	<p>SIA Name: MaxRecords</p> <p>Value type: integer: <code>xs:int</code></p> <p>Semantic Meaning: The largest number of records that the Image Query web method will return.</p> <p>Occurrences: required</p>
testQuery	<p>Value type: composite: sia:Query</p> <p>Semantic Meaning: a set of query parameters that is expected to produce at least one matched record which can be used to test the service.</p> <p>Occurrences: optional</p>

The `sia:ImageServiceType` type is provided to restrict the values of the `<imageServiceType>` element to those allowed by the SIA standard:

sia:ImageServiceType Type Schema Definition

```
<xs:simpleType name="ImageServiceType" >
  <xs:restriction base="xs:token" >
    <xs:enumeration value="Cutout" />
    <xs:enumeration value="Mosaic" />
    <xs:enumeration value="Atlas" />
    <xs:enumeration value="Pointed" />
  </restriction>
</simpleType>
```

Note:

The [SIA](#) specification defines the image service types as follows:

Image Cutout Service

This is a service which extracts or "cuts out" rectangular regions of some larger image, returning an image of the requested size to the client. Such images are usually drawn from a database or a collection of survey images that cover some large portion of the sky. To be considered a cutout service, the returned image should closely approximate (or at least not exceed) the size of the requested region; however, a cutout service will not normally resample (rescale or reproject) the pixel data. A cutout service may mosaic image segments to cover a large region but is still considered a cutout service if it does not resample the data. Image cutout services are fast and avoid image degradation due to resampling.

Image Mosaicing Service

This service is similar to the image cutout service but adds the capability to compute an image of the size, scale, and projection specified by the client. Mosaic services include services which resample and reproject existing image data, as well as services which generate pixels from some more fundamental dataset, e.g., a high energy event list or a radio astronomy measurement set. Image mosaics can be expensive to generate for large regions but they make it easier for the client to overlay image data from different sources. Image mosaicing services which resample already pixelated data will degrade the data slightly, unlike the simpler cutout service which returns the data unchanged.

Atlas Image Archive

This category of service provides access to pre-computed images that make up a survey of some large portion of the sky. The service, however, is not capable of dynamically cutting out requested regions, and the size of atlas images is predetermined by the survey. Atlas images may range in size from small cutouts of extended objects to large calibrated survey data frames.

Pointed Image Archive

This category of service provides access to collections of images of many small, "pointed" regions of the sky. "Pointed" images normally focus on specific sources in the sky as opposed to being part of a sky survey. This type of service usually applies to instrumental archives from observatories with guest observer programs (e.g., the HST archive) and other general purpose image archives (e.g., the ADIL). If a service provides access to both survey and pointed images, then it should be considered a Pointed Image Archive for the purposes of this specification; if a differentiation between the types of data is desired the pointed and survey data collections should be registered as separate image services.

Several of the `sia:SimpleImageAccess` metadata use complex types to capture their values; the subsequent sections below define those special types.

3.2.2.1. SkySize

The `sia:skySize` type is used to capture simple rectangular extents on the sky along longitudinal and latitudinal directions. It is defined as follows:

sia:SkySize Type Schema Definition

```
<xs:complexType name="SkySize" >
  <xs:sequence >
    <xs:element name="long" type="xs:float" />
    <xs:element name="lat" type="xs:float" />
  </sequence>
</complexType>
```

The coordinate system for the region is intended to be implied by the context of its use--i.e. the definition of the element defined with this type. In this SIA case, the longitudinal and latitudinal values represent the extents along right ascension and declination in the ICRS system (the system assumed by the SIA interface).

sia:SkySize Metadata Elements	
Element	Definition
long	<i>Value type:</i> floating-point number: <code>xs:float</code> <i>Semantic Meaning:</i> The maximum size in the longitude (R.A.) direction <i>Occurrences:</i> required
lat	<i>Value type:</i> floating-point number: <code>xs:float</code> <i>Semantic Meaning:</i> The maximum size in the latitude (Dec.) direction <i>Occurrences:</i> required

3.2.2.2. ImageSize

The `sia:ImageSize` type is used to capture an image size in pixel widths along the longitudinal and latitudinal directions of the image. It is defined as follows:

sia:ImageSize Type Schema Definition	
<pre><xs:complexType name="ImageSize" > <xs:sequence > <xs:element name="long" type="xs:int" /> <xs:element name="lat" type="xs:int" /> </sequence> </complexType></pre>	

The sky coordinate axes may not particularly parallel with the image axes (e.g. due to rotation or projection effects); in this case, the longitudinal side should be considered the side of the image that it cuts the smallest angle with.

sia:ImageSize Metadata Elements	
Element	Definition
long	<i>Value type:</i> integer: <code>xs:int</code> <i>Semantic Meaning:</i> The image size in the longitude (R.A.) direction in pixels <i>Occurrences:</i> required
lat	<i>Value type:</i> integer: <code>xs:int</code> <i>Semantic Meaning:</i> The image size in the latitude (Dec.) direction in pixels <i>Occurrences:</i> required

3.2.2.3. testQuery and the Query Type

As with the other DAL `vr:capability` types, the `<testQuery>` element is intended to help other VO components (e.g. registries, validation services, services that monitor the VO's operational health--but typically not end users) test that the service is up and operating correctly. It provides a set of legal input parameters that should return a legal response that includes at least matched record. Since this query is intended for testing purposes, the size of the result set should be small.

The `sia:Query` type captures the different components of the query into separate elements, as defined below:

sia:Query Type Schema Definition

```
<xs:complexType name="Query" >
  <xs:sequence >
    <xs:element name="pos" type="sia:SkyPos" minOccurs="0" />
    <xs:element name="size" type="sia:SkySize" minOccurs="0" />
    <xs:element name="verb" type="xs:positiveInteger" minOccurs="0" />
    <xs:element name="extras" type="xs:string" minOccurs="0" />
  </sequence>
</complexType>
```

The individual sub-elements are defined as follows:

sia:Query Metadata Elements	
Element	Definition
pos	<p><i>Value type:</i> composite: sia:SkyPos</p> <p><i>Semantic Meaning:</i> the center position of the rectangular region that should be used as part of the query to the SIA service.</p> <p><i>Occurrences:</i> optional</p>
size	<p><i>Value type:</i> composite: sia:SkySize</p> <p><i>Semantic Meaning:</i> the rectangular size of the region that should be used as part of the query to the SIA service.</p> <p><i>Occurrences:</i> optional</p>
verb	<p><i>Value type:</i> positive integer: <code>xs:positiveInteger</code></p> <p><i>Semantic Meaning:</i> the verbosity level to use where 1 or less means the bare minimum set of columns and 3 or more means the full set of available columns.</p> <p><i>Occurrences:</i> optional</p>
extras	<p><i>Value type:</i> string: <code>xs:string</code></p> <p><i>Semantic Meaning:</i> any extra (particularly non-standard) parameters that must be provided (apart from what is part of base URL given by the <code>accessURL</code> element).</p> <p><i>Occurrences:</i> optional</p> <p><i>Comments:</i> this value should be in the form of name=value pairs delimited with ampersands (&, properly escaped for inclusion into XML).</p>

3.2.2.4. SkyPos

The `sia:SkyPos` type is used to encode the `<testQuery>`'s `<pos>` element, the center position of the test region of interest.

sia:SkyPos Type Schema Definition

```
<xs:complexType name="SkyPos" >
  <xs:sequence >
    <xs:element name="long" type="xs:double" />
    <xs:element name="lat" type="xs:double" />
  </sequence>
</complexType>
```

sia:SkyPos Metadata Elements	
Element	Definition
long	<i>Value type:</i> floating-point number: <code>xs:double</code> <i>Semantic Meaning:</i> The sky position in the longitude (R.A.) direction <i>Occurrences:</i> required
lat	<i>Value type:</i> floating-point number: <code>xs:double</code> <i>Semantic Meaning:</i> The sky position in the latitude (Dec.) direction <i>Occurrences:</i> required

3.3. Simple Spectral Access

This section describes the SSA VOResource metadata extension schema which is used to describe services that comply with the Simple Spectral Access protocol. This differs from the other Simple DAL extensions in that it defines two `vr:Capability` types: [ssap:SimpleSpectralAccess](#) and [ssap:ProtoSpectralAccess](#). The former is intended for services that are intended to be compliant with published SSA Recommendation [SSA]. The latter is intended for services that were deployed prior to the publication of the SSA Recommendation (see [section 3.3.3, below](#)).

3.3.1. The Schema Namespace

The namespace associated with the SSA extension schema is "http://www.ivoa.net/xml/SSA/1.0". The namespace prefix, `ssap`, should be used in applications where common use of prefixes improves interoperability (e.g. in the IVOA registries [RI]). Furthermore, we use the `ssap` prefix in this document to refer to types defined as part of the SSA extension schema.

Note:

Though it departs a bit from convention, the `ssap` prefix was chosen to avoid a collision with its use in [SSA] for identifying UTypes from the Spectral Data Model.

3.3.2. SimpleSpectralAccess

The `ssap:SimpleSpectralAccess` type is `vr:Capability` sub-type that should be used to describe a service's support for the Simple Spectral Access protocol [SSA]; it is defined as follows:

ssap:SimpleSpectralAccess Type Schema Definition

```
<xs:complexType name="SSACapRestriction" abstract="true" >
  <xs:complexContent >
    <xs:restriction base="vr:Capability" >
      <xs:sequence >
        <xs:element name="validationLevel" type="vr:Validation" minOccurs="0"
          maxOccurs="unbounded" />
        <xs:element name="description" type="xs:token" minOccurs="0" />
        <xs:element name="interface" type="vr:Interface" minOccurs="0"
          maxOccurs="unbounded" />
      </sequence>
      <xs:attribute name="standardID" type="vr:IdentifierURI" use="required"
        fixed="ivo://ivoa.net/std/SSA" />
    </restriction>
  </complexContent>
</complexType>

<xs:complexType name="SimpleSpectralAccess" >
  <xs:complexContent >
    <xs:extension base="ssap:SSACapRestriction" >
      <xs:sequence >
        <xs:element name="complianceLevel" type="ssap:ComplianceLevel" />
        <xs:element name="dataSource" type="ssap:DataSource"
          minOccurs="1" maxOccurs="unbounded" />
        <xs:element name="creationType" type="ssap:CreationType"
          minOccurs="1" maxOccurs="unbounded" />
        <xs:element name="supportedFrame" type="ssap:SupportedFrame"
          minOccurs="1" maxOccurs="unbounded"/>
        <xs:element name="maxSearchRadius" type="xs:double" />
        <xs:element name="maxRecords" type="xs:int" />
        <xs:element name="defaultMaxRecords" type="xs:int" />
        <xs:element name="maxAperture" type="xs:double" minOccurs="0" />
        <xs:element name="maxFileSize" type="xs:int" maxOccurs="1" minOccurs="0" />
        <xs:element name="testQuery" type="ssap:Query" minOccurs="0" maxOccurs="1" />
      </sequence>
    </extension>
  </complexContent>
</complexType>
```

The `ssap:SSACapRestriction` is defined to fix the value of the `standardID` attribute; thus, all uses of the `ssap:SimpleSpectralAccess` type must set `standardID` to "ivo://ivoa.net/std/SSA". Because the `cs:SSACapRestriction` is marked as abstract, instance documents can not use it directly as a value for the `xsi:type` attribute.

The custom metadata that the `ssap:SimpleSpectralAccess` type provides is given in the table below. Note that some of these elements derive from the SSA standard [SSA]; others, from the RM standard [RM]. The "Semantic Meaning" entry provides the reference to the original definition.

ssap:SimpleSpectralAccess Extension Metadata Elements	
Element	Definition
complianceLevel	<p><i>Value type:</i> string with controlled vocabulary</p> <p><i>Semantic Meaning:</i> The category indicating the level to which this instance complies with the SSA standard, as defined in [SSA], section 1.4.1.</p> <p><i>Occurrences:</i> required</p> <p><i>Allowed Values:</i></p> <ul style="list-style-type: none"> query The service supports all of the capabilities and features of the SSA protocol identified as "must" in the specification, except that it does not support returning data in at least one SSA-compliant format. minimal The service supports all of the capabilities and features of the SSA protocol identified as "must" in the specification. full The service supports all of the capabilities and features of the SSA protocol identified as "must" or "should" in the specification.
dataSource	<p><i>Value type:</i> string with controlled vocabulary</p> <p><i>Semantic Meaning:</i> The category specifying where the data originally came from, as defined in [SSA], section 2.5.1.</p> <p><i>Occurrences:</i> required; multiple occurrences allowed.</p> <p><i>Allowed Values:</i></p> <ul style="list-style-type: none"> survey A survey dataset, which typically covers some region of observational parameter space in a uniform fashion, with as complete as possible coverage in the region of parameter space observed. pointed A pointed observation of a particular astronomical object or field. custom Data which has been custom processed, e.g., as part of a specific research project. theory Theory data, or any data generated from a theoretical model, for example a synthetic spectrum. artificial Artificial or simulated data.

Table continued next page.

creationType	<p>Value type: string with controlled vocabulary</p> <p>Semantic Meaning: The category that describes the process used to produce the dataset, as defined in [SSA], section 2.5.1.</p> <p>Occurrences: required; multiple occurrences allowed.</p> <p>Allowed Values:</p> <table border="0"> <tr> <td style="padding-right: 20px;">archival</td> <td>The entire archival or project dataset is returned. Transformations such as metadata or data model mediation or format conversions may take place, but the content of the dataset is not substantially modified (e.g., all the data is returned and the sample values are not modified).</td> </tr> <tr> <td>cutout</td> <td>The dataset is subsetted in some region of parameter space to produce a subset dataset. Sample values are not modified, e.g., cutouts could be recombined to reconstitute the original dataset.</td> </tr> <tr> <td>filtered</td> <td>The data is filtered in some fashion to exclude portions of the dataset, e.g., passing only data in selected regions along a measurement axis, or processing the data in a way which recomputes the sample values, e.g., due to interpolation or flux transformation.</td> </tr> <tr> <td>mosaic</td> <td>Data from multiple non- or partially-overlapping datasets are combined to produce a new dataset.</td> </tr> <tr> <td>projection</td> <td>Data is geometrically warped or dimensionally reduced by projecting through a multidimensional dataset.</td> </tr> <tr> <td>specialExtraction</td> <td>Extraction of a spectrum from another dataset, e.g., extraction of a spectrum from a spectral data cube through a simulated aperture.</td> </tr> <tr> <td>catalogExtraction</td> <td>Extraction of a catalog of some form from another dataset, e.g., extraction of a source catalog from an image, or extraction of a line list catalog from a spectrum (not valid for a SSA service).</td> </tr> </table> <p>Comments: Typically this describes only the processing performed by the data service, but it could describe some additional earlier processing as well, e.g., if data is partially precomputed.</p>	archival	The entire archival or project dataset is returned. Transformations such as metadata or data model mediation or format conversions may take place, but the content of the dataset is not substantially modified (e.g., all the data is returned and the sample values are not modified).	cutout	The dataset is subsetted in some region of parameter space to produce a subset dataset. Sample values are not modified, e.g., cutouts could be recombined to reconstitute the original dataset.	filtered	The data is filtered in some fashion to exclude portions of the dataset, e.g., passing only data in selected regions along a measurement axis, or processing the data in a way which recomputes the sample values, e.g., due to interpolation or flux transformation.	mosaic	Data from multiple non- or partially-overlapping datasets are combined to produce a new dataset.	projection	Data is geometrically warped or dimensionally reduced by projecting through a multidimensional dataset.	specialExtraction	Extraction of a spectrum from another dataset, e.g., extraction of a spectrum from a spectral data cube through a simulated aperture.	catalogExtraction	Extraction of a catalog of some form from another dataset, e.g., extraction of a source catalog from an image, or extraction of a line list catalog from a spectrum (not valid for a SSA service).
archival	The entire archival or project dataset is returned. Transformations such as metadata or data model mediation or format conversions may take place, but the content of the dataset is not substantially modified (e.g., all the data is returned and the sample values are not modified).														
cutout	The dataset is subsetted in some region of parameter space to produce a subset dataset. Sample values are not modified, e.g., cutouts could be recombined to reconstitute the original dataset.														
filtered	The data is filtered in some fashion to exclude portions of the dataset, e.g., passing only data in selected regions along a measurement axis, or processing the data in a way which recomputes the sample values, e.g., due to interpolation or flux transformation.														
mosaic	Data from multiple non- or partially-overlapping datasets are combined to produce a new dataset.														
projection	Data is geometrically warped or dimensionally reduced by projecting through a multidimensional dataset.														
specialExtraction	Extraction of a spectrum from another dataset, e.g., extraction of a spectrum from a spectral data cube through a simulated aperture.														
catalogExtraction	Extraction of a catalog of some form from another dataset, e.g., extraction of a source catalog from an image, or extraction of a line list catalog from a spectrum (not valid for a SSA service).														

Table continued next page.

supportedFrame	<p><i>Value type:</i> string with controlled vocabulary</p> <p><i>Semantic Meaning:</i> The [STC] name of the space-time coordinate frames that this service can accept in. Values given here can be used as the coordinate frame argument to the SSA POS query parameter (See [SSA], section 4.1.1.1).</p> <p><i>Occurrences:</i> required; multiple occurrences allowed.</p> <p><i>Allowed Values:</i> FK4, FK5, ECLIPTIC, ICRS, GALACTIC_I, GALACTIC_II, SUPER_GALACTIC, AZ_EL, BODY, GEO_C, GEO_D, MAG, GSE, GSM, SM, HGC, HGS, HEEQ, HRTN, HPC, HPR, HCC, HGI, MERCURY_C, VENUS_C, LUNA_C, MARS_C, JUPITER_C_III, SATURN_C_III, URANUS_C_III, NEPTUNE_C_III, PLUTO_C, MERCURY_G, VENUS_G, LUNA_G, MARS_G, JUPITER_G_III, SATURN_G_III, URANUS_G_III, NEPTUNE_G_III, PLUTO_G, UNKNOWN ; their meanings are defined in Table 3 (section 4.4.1.2.3) of [STC].</p> <p><i>Comments:</i> Since the [SSA] standard requires that IRCS be supported by default, the list of supported frame provided here must include at least ICRS.</p>
maxSearchRadius	<p><i>Value type:</i> floating-point number: <code>xs:double</code></p> <p><i>Semantic Meaning:</i> The largest search radius, in degrees, that will be accepted by the service without returning an error condition (as defined in [RM], section 5.2).</p> <p><i>Occurrences:</i> required</p> <p><i>Comments:</i> Use 180.0 if there is no restriction.</p>
maxRecords	<p><i>Value type:</i></p> <p><i>Semantic Meaning:</i> The hard limit on the largest number of records that the query operation will return in a single response (as defined in [RM], section 5.2).</p> <p><i>Occurrences:</i> required</p>
defaultMaxRecords	<p><i>Value type:</i></p> <p><i>Semantic Meaning:</i> The largest number of records that the service will return when the MAXREC parameter not specified in the query input.</p> <p><i>Occurrences:</i> required</p>
maxAperture	<p><i>Value type:</i> floating-point number: <code>xs:double</code></p> <p><i>Semantic Meaning:</i> The largest aperture that can be supported upon request via the APERTURE input parameter by a service that supports the special extraction creation method.</p> <p><i>Occurrences:</i> optional</p> <p><i>Comments:</i> A value of 180 (the default) means there is no theoretical limit.</p>

Table continued next page.

maxFileSize	<p><i>Value type:</i></p> <p><i>Semantic Meaning:</i> The maximum image file size in bytes.</p> <p><i>Occurrences:</i> optional</p>
testQuery	<p><i>Value type:</i> composite: ssap:Query</p> <p><i>Semantic Meaning:</i> a set of query parameters that is expected to produce at least one matched record which can be used to test the service.</p> <p><i>Occurrences:</i> optional</p>

The controlled vocabulary given for the above elements are set by their respective simple types:

ssap:ComplianceLevel Type Schema Definition

```
<xs:simpleType name="ComplianceLevel" >
  <xs:restriction base="xs:token" >
    <xs:enumeration value="query" />
    <xs:enumeration value="minimal" />
    <xs:enumeration value="full" />
  </restriction>
</simpleType>
```

ssap:DataSource Type Schema Definition

```
<xs:simpleType name="DataSource" >
  <xs:restriction base="xs:token" >
    <xs:enumeration value="survey" />
    <xs:enumeration value="pointed" />
    <xs:enumeration value="custom" />
    <xs:enumeration value="theory" />
    <xs:enumeration value="artificial" />
  </restriction>
</simpleType>
```

ssap:CreationType Type Schema Definition

```
<xs:simpleType name="CreationType" >
  <xs:restriction base="xs:token" >
    <xs:enumeration value="archival" />
    <xs:enumeration value="cutout" />
    <xs:enumeration value="filtered" />
    <xs:enumeration value="mosaic" />
    <xs:enumeration value="projection" />
    <xs:enumeration value="specialExtraction" />
    <xs:enumeration value="catalogExtraction" />
  </restriction>
</simpleType>
```

ssap:SupportedFrame Type Schema Definition

```
<xs:simpleType name="SupportedFrame" >
  <xs:restriction base="xs:token" >
    <xs:enumeration value="FK4"/>
    <xs:enumeration value="FK5"/>
    <xs:enumeration value="ECLIPTIC"/>
    <xs:enumeration value="ICRS"/>
    <xs:enumeration value="GALACTIC_I"/>
    <xs:enumeration value="GALACTIC_II"/>
    <xs:enumeration value="SUPER_GALACTIC"/>
    <xs:enumeration value="AZ_EL"/>
    <xs:enumeration value="BODY"/>
    <xs:enumeration value="GEO_C"/>
    <xs:enumeration value="GEO_D"/>
    <xs:enumeration value="MAG"/>
    <xs:enumeration value="GSE"/>
    <xs:enumeration value="GSM"/>
    <xs:enumeration value="HGC"/>
    <xs:enumeration value="HGS"/>
    <xs:enumeration value="HEEQ"/>
    <xs:enumeration value="HRTN"/>
    <xs:enumeration value="HPC"/>
    <xs:enumeration value="HPR"/>
    <xs:enumeration value="HCC"/>
    <xs:enumeration value="HGI"/>
    <xs:enumeration value="MERCURY_C"/>
    <xs:enumeration value="VENUS_C"/>
    <xs:enumeration value="LUNA_C"/>
    <xs:enumeration value="MARS_C"/>
    <xs:enumeration value="JUPITER_C_III"/>
    <xs:enumeration value="SATURN_C_III"/>
    <xs:enumeration value="URANUS_C_III"/>
    <xs:enumeration value="NEPTUNE_C_III"/>
    <xs:enumeration value="PLUTO_C"/>
    <xs:enumeration value="MERCURY_G"/>
    <xs:enumeration value="VENUS_G"/>
    <xs:enumeration value="LUNA_G"/>
    <xs:enumeration value="MARS_G"/>
    <xs:enumeration value="JUPITER_G_III"/>
    <xs:enumeration value="SATURN_G_III"/>
    <xs:enumeration value="URANUS_G_III"/>
    <xs:enumeration value="NEPTUNE_G_III"/>
    <xs:enumeration value="PLUTO_G"/>
    <xs:enumeration value="UNKNOWN"/>
  </restriction>
</simpleType>
```

The definitions of the coordinate reference frames identified in the `ssap:SupportedFrame` type are the same given in [\[STC\]](#) (and the references therein).

3.3.2.1 testQuery and the Query Type

As with the other DAL `vr:capability` types, the `<testQuery>` element is intended to help other VO components (e.g. registries, validation services, services that monitor the VO's operational health--but typically not end users) test that the service is up and operating correctly. It provides a set of legal input parameters that should return a legal response that includes at least matched record. Since this query is intended for testing purposes, the size of the result set should be small.

The `ssap:Query` type captures the different components of the query into separate elements, as defined below:

```

ssap:Query Type Schema Definition

<xs:complexType name="Query" >
  <xs:sequence >
    <xs:element name="pos" type="ssap:PosParam" minOccurs="0" />
    <xs:element name="size" type="xs:double" minOccurs="0" />
    <xs:element name="queryDataCmd" type="xs:string" minOccurs="0" />
  </sequence>
</complexType>

```

The individual sub-elements are defined as follows:

ssap:Query Metadata Elements	
Element	Definition
pos	<p><i>Value type:</i> composite: ssap:PosParam</p> <p><i>Semantic Meaning:</i> the center position the search cone given in decimal degrees.</p> <p><i>Occurrences:</i> optional</p>
size	<p><i>Value type:</i> floating-point number: <code>xs:double</code></p> <p><i>Semantic Meaning:</i> the size of the search radius.</p> <p><i>Occurrences:</i> optional</p>
queryDataCmd	<p><i>Value type:</i> string: <code>xs:string</code></p> <p><i>Semantic Meaning:</i> Fully specified test query formatted as an URL argument list in the syntax specified by the SSA standard. The list must exclude the REQUEST argument which is assumed to be set to "queryData".</p> <p><i>Occurrences:</i> optional</p> <p><i>Comments:</i> This value must be in the form of name=value pairs delimited with ampersands (&). A query may then be formed by appending to the base URL the request argument, "REQUEST=queryData&", followed by the contents of this element.</p>

3.3.2.2. PosParam

The `ssap:PosParam` type is used to encode the `<testQuery>`'s `<pos>` element, the center position of the test region of interest; it is defined as follows:

```

ssap:PosParam Type Schema Definition

<xs:complexType name="PosParam" >
  <xs:sequence >
    <xs:element name="long" type="xs:double" minOccurs="0" />
    <xs:element name="lat" type="xs:double" minOccurs="0" />
    <xs:element name="refframe" type="xs:token" minOccurs="0" />
  </sequence>
</complexType>

```

This type differs from the corresponding test position types used by the other DAL extensions in that it allows one to specify a coordinate reference frame supported by SSA's POS input parameter (see [SSA], section 4.1.1.1).

ssap:PosParam Metadata Elements	
Element	Definition
long	<p><i>Value type:</i> floating-point number: <code>xs:double</code></p> <p><i>Semantic Meaning:</i> The longitude (e.g. Right Ascension) of the center of the search position in decimal degrees.</p> <p><i>Occurrences:</i> optional</p>
lat	<p><i>Value type:</i> floating-point number: <code>xs:double</code></p> <p><i>Semantic Meaning:</i> The latitude (e.g. Declination) of the center of the search position in decimal degrees.</p> <p><i>Occurrences:</i> optional</p>
refframe	<p><i>Value type:</i> string: <code>xs:token</code></p> <p><i>Semantic Meaning:</i> the coordinate system reference frame name indicating the frame to assume for the given position. If not provided, ICRS is assumed.</p> <p><i>Occurrences:</i> optional</p>

3.3.3. ProtoSpectralAccess

The `ssap:ProtoSpectralAccess` type is provided for a special class of SSA services that were historically deployed prior to the publication of the SSA Recommendation [SSA]. An SSA service should describe its support for the protocol using this capability type if it was implemented against an earlier draft of the protocol specification and, therefore, is not expected to be compliant with the actual SSA Recommendation.

This type is defined exactly as the [ssap:SimpleSpectralAccess](#) type:

ssap:ProtoSpectralAccess Type Schema Definition
<pre> <xs:complexType name="ProtoSpectralAccess" > <xs:complexContent > <xs:extension base="ssap:SSACapRestriction" > <xs:sequence > <xs:element name="dataSource" type="ssap:DataSource" minOccurs="1" maxOccurs="unbounded" /> <xs:element name="creationType" type="ssap:CreationType" minOccurs="1" maxOccurs="unbounded" /> <xs:element name="maxSearchRadius" type="xs:double" /> <xs:element name="maxRecords" type="xs:int" /> <xs:element name="defaultMaxRecords" type="xs:int" /> <xs:element name="maxAperture" type="xs:double" minOccurs="0" /> <xs:element name="maxFileSize" type="xs:int" maxOccurs="1" minOccurs="0" /> <xs:element name="testQuery" type="ssap:Query" minOccurs="0" maxOccurs="1" /> </sequence> </extension> </complexContent> </complexType> </pre>

Use of this type is intended to be temporary: providers whose SSA service falls into this category are encouraged to up-date the service for compliance final SSA Recommendation. A VOResource resource description must not include both a `ssap:SimpleSpectralAccess` capability and a `ssap:ProtoSpectralAccess` capability that describe the same service base URL, as given by the `<interface>'S <accessURL>`.

3.4. Simple Line Access

This section describes the SLA VOResource metadata extension schema which is used to describe services that comply with the Simple Line Access protocol [SLA].

3.4.1. The Schema Namespace

The namespace associated with the SLA extension schema is "http://www.ivoa.net/xml/SLAP/1.0". The namespace prefix, `sia`, should be used in applications where common use of prefixes improves interoperability (e.g. in the IVOA registries [RI]). Furthermore, we use the `slap` prefix in this document to refer to types defined as part of the SLA extension schema.

3.4.2. SimpleLineAccess

The `sia:SimpleLineAccess` type is a `vr:Capability` sub-type that should be used to describe a service's support for the Simple Line Access protocol [SLA]; it is defined as follows:

slap:SLAPCapRestriction Type Schema Definition

```
<xs:complexType name="SLAPCapRestriction" abstract="true" >
  <xs:complexContent >
    <xs:restriction base="vr:Capability" >
      <xs:sequence >
        <xs:element name="validationLevel" type="vr:Validation" minOccurs="0"
          maxOccurs="unbounded" />
        <xs:element name="description" type="xs:token" minOccurs="0" />
        <xs:element name="interface" type="vr:Interface" minOccurs="0"
          maxOccurs="unbounded" />
      </sequence>
      <xs:attribute name="standardID" type="vr:IdentifierURI" use="required"
        fixed="ivo://ivoa.net/std/SLAP" />
    </restriction>
  </complexContent>
</complexType>

<xs:complexType name="SimpleLineAccess" >
  <xs:complexContent >
    <xs:extension base="slap:SLAPCapRestriction" >
      <xs:sequence >
        <xs:element name="complianceLevel" type="slap:ComplianceLevel" />
        <xs:element name="dataSource" type="slap:DataSource" />
        <xs:element name="maxRecords" type="xs:int" />
        <xs:element name="testQuery" type="slap:Query" minOccurs="0" maxOccurs="1" />
      </sequence>
    </extension>
  </complexContent>
</complexType>
```

The custom metadata that the `slap:SimpleLineAccess` type provides is given in the table below.

slap:SimpleLineAccess Extension Metadata Elements	
Element	Definition
<code>complianceLevel</code>	<p><i>Value type:</i> string with controlled vocabulary</p> <p><i>Semantic Meaning:</i> The category indicating the level to which this service instance complies with the SLAP standard.</p> <p><i>Occurrences:</i> required</p> <p><i>Allowed Values:</i></p> <ul style="list-style-type: none"> <code>minimal</code> The service supports all of the capabilities and features of the SLAP protocol identified as "must" in the specification. <code>full</code> The service supports, at a minimum, all of the capabilities and features of the SLAP protocol identified as "must" or "should" in the specification. <p><i>Comments:</i> Allowed values are "minimal" and "full". See definitions of allowed values for details.</p>
<code>dataSource</code>	<p><i>Value type:</i> string with controlled vocabulary</p> <p><i>Semantic Meaning:</i> The category specifying where the data accessed by the service originally came from.</p> <p><i>Occurrences:</i> required</p> <p><i>Allowed Values:</i></p> <ul style="list-style-type: none"> <code>observational/astrophysical</code> Lines observed and identified in real spectra of astrophysical observations by different instrument/projects <code>observational/laboratory</code> Lines observed and identified in real spectra of laboratory measurements <code>theoretical</code> Servers containing theoretical spectral lines <p><i>Comments:</i> Allowed values are "observational/astrophysical", "observational/laboratory", "theoretical"</p>
<code>maxRecords</code>	<p><i>Value type:</i></p> <p><i>Semantic Meaning:</i> The hard limit on the largest number of records that the query operation will return in a single response.</p> <p><i>Occurrences:</i> required</p> <p><i>Comments:</i> If not specified there is no predefined hard limit on the number of records in a query response.</p>

Table continued next page.

testQuery	<p>Value type: composite: slap:Query</p> <p>Semantic Meaning: A set of queryData parameters that is expected to produce at least one matched record which can be used to test the service.</p> <p>Occurrences: optional</p> <p>Comments: The value should include all parameters required for the test query but should exclude the baseURL and the REQUEST parameter.</p>
-----------	--

The controlled vocabulary given for the above elements are set by their respective simple types:

slap:ComplianceLevel Type Schema Definition

```
<xs:simpleType name="ComplianceLevel" >
  <xs:restriction base="xs:token" >
    <xs:enumeration value="minimal" />
    <xs:enumeration value="full" />
  </restriction>
</simpleType>
```

slap:DataSource Type Schema Definition

```
<xs:simpleType name="DataSource" >
  <xs:restriction base="xs:token" >
    <xs:enumeration value="observational/astrophysical" />
    <xs:enumeration value="observational/laboratory" />
    <xs:enumeration value="theoretical" />
  </restriction>
</simpleType>
```

3.3.2.1 testQuery and the Query Type

As with the other DAL `vr:capability` types, the `<testQuery>` element is intended to help other VO components (e.g. registries, validation services, services that monitor the VO's operational health--but typically not end users) test that the service is up and operating correctly. It provides a set of legal input parameters that should return a legal response that includes at least matched record. Since this query is intended for testing purposes, the size of the result set should be small.

The `slap:Query` type captures the different components of the query into separate elements, as defined below:

slap:Query Type Schema Definition

```
<xs:complexType name="Query" >
  <xs:sequence >
    <xs:element name="wavelength" type="slap:WavelengthRange" minOccurs="0" />
    <xs:element name="queryDataCmd" type="xs:string" minOccurs="0" />
  </sequence>
</complexType>
```

The individual sub-elements are defined as follows:

slap:Query Metadata Elements	
Element	Definition
wavelength	<p><i>Value type:</i> composite: slap:WavelengthRange</p> <p><i>Semantic Meaning:</i> Spectral range in meters to be used to constrain the query of spectral lines.</p> <p><i>Occurrences:</i> optional</p>
queryDataCmd	<p><i>Value type:</i> string: <code>xs:string</code></p> <p><i>Semantic Meaning:</i> Fully specified queryData test query formatted as an URL argument list in the syntax specified by the SLAP standard. The list must exclude the REQUEST argument which is assumed to be set to "queryData". VERSION may be included if the test query applies to a specific version of the service protocol.</p> <p><i>Occurrences:</i> optional</p> <p><i>Comments:</i> If queryDataCmd is used to form a query, the default value of WAVELENGTH specified above is not used; if the test query requires WAVELENGTH it should be included directly in queryDataCmd.</p> <p>This value must be a string in the form of name=value pairs delimited with ampersands (&). A query may then be formed by appending to the baseURL the request argument, "REQUEST=queryData&", followed by the contents of this element.</p>

3.4.2.2. WavelengthRange

The `slap:WavelengthRange` type is used to encode the `<testQuery>`'S `<wavelength>` element, the range of wavelengths to search.

slap:WavelengthRange Type Schema Definition
<pre><xs:complexType name="WavelengthRange" > <xs:sequence > <xs:element name="minWavelength" type="xs:double" minOccurs="0" /> <xs:element name="maxWavelength" type="xs:double" minOccurs="0" /> </sequence> </complexType></pre>

slap:WavelengthRange Metadata Elements	
Element	Definition
minWavelength	<p><i>Value type:</i> floating-point number: <code>xs:double</code></p> <p><i>Semantic Meaning:</i> Minimum wavelength in meters to be used to constrain the query of spectral lines</p> <p><i>Occurrences:</i> optional</p>
maxWavelength	<p><i>Value type:</i> floating-point number: <code>xs:double</code></p> <p><i>Semantic Meaning:</i> Maximum wavelength in meters to be used to constrain the query of spectral lines</p> <p><i>Occurrences:</i> optional</p>

Appendix A: The XML Schemas

A.1. The ConeSearch XML Schema

The Complete ConeSearch Schema
<pre> <?xml version="1.0" encoding="UTF-8"?> <xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema" xmlns:vr="http://www.ivoa.net/xml/VOResource/v1.0" xmlns:cs="http://www.ivoa.net/xml/ConeSearch/v1.0" xmlns:vm="http://www.ivoa.net/xml/VOMetadata/v0.1" targetNamespace="http://www.ivoa.net/xml/ConeSearch/v1.0" elementFormDefault="unqualified" attributeFormDefault="unqualified" version="1.0"> <xs:annotation> <xs:appinfo> <vm:schemaName>ConeSearch</vm:schemaName> <vm:schemaPrefix>xs</vm:schemaPrefix> <vm:targetPrefix>cs</vm:targetPrefix> </xs:appinfo> <xs:documentation> Implementation of an XML Schema describing a Cone Search Service. Based on "Simple Cone Search: a First Guide for Data Curators", http://www.us-vo.org/metadata/conesearch/. </xs:documentation> <xs:documentation> This schema defines a Capability type that is specific to Cone Search. A service that has ConeSearch capability should be registered as a TabularSkyService. The ConeSearch capability element must include a ParamHTTP interface. </xs:documentation> </xs:annotation> <xs:import namespace="http://www.ivoa.net/xml/VOResource/v1.0" schemaLocation="http://www.ivoa.net/xml/VOResource/v1.0"/> <xs:complexType name="CSCapRestriction" abstract="true"> <xs:annotation> <xs:documentation> an abstract capability that fixes the standardID to the </pre>

```

        IVOA ID for the ConeSearch standard.
    </xs:documentation>
    <xs:documentation>
        See vr:Capability for documentation on inherited children.
    </xs:documentation>
</xs:annotation>
<xs:complexContent>
    <xs:restriction base="vr:Capability">
        <xs:sequence>
            <xs:element name="validationLevel" type="vr:Validation"
                minOccurs="0" maxOccurs="unbounded"/>
            <xs:element name="description" type="xs:token"
                minOccurs="0"/>
            <xs:element name="interface" type="vr:Interface"
                minOccurs="0" maxOccurs="unbounded"/>
        </xs:sequence>
        <xs:attribute name="standardID" type="vr:IdentifierURI"
            use="required" fixed="ivo://ivoa.net/std/ConeSearch"/>
    </xs:restriction>
</xs:complexContent>
</xs:complexType>

<xs:complexType name="ConeSearch">
    <xs:annotation>
        <xs:documentation>
            The capabilities of a Cone Search implementation.
        </xs:documentation>
    </xs:annotation>

    <xs:complexContent>
        <xs:extension base="cs:CSCapRestriction">
            <xs:sequence>
                <xs:element name="maxSR" type="xs:float">
                    <xs:annotation>
                        <xs:documentation>
                            The largest search radius, in degrees, that will be
                            accepted by the service without returning an error
                            condition.
                        </xs:documentation>
                        <xs:documentation>
                            Use 180.0 if there is no restriction.
                        </xs:documentation>
                    </xs:annotation>
                </xs:element>

                <xs:element name="maxRecords" type="xs:int">
                    <xs:annotation>
                        <xs:documentation>
                            The largest number of records that the service will
                            return.
                        </xs:documentation>
                    </xs:annotation>
                </xs:element>

                <xs:element name="verbosity" type="xs:boolean">
                    <xs:annotation>
                        <xs:documentation>
                            True if the service supports the VERB keyword;
                            false, otherwise.
                        </xs:documentation>
                    </xs:annotation>
                </xs:element>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>

```



```

        <xs:element name="testQuery" type="cs:Query">
          <xs:annotation>
            <xs:documentation>
              A query that will result in at least on
              matched record that can be used to test the
              service.
            </xs:documentation>
          </xs:annotation>
        </xs:element>

      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

<xs:complexType name="Query">
  <xs:annotation>
    <xs:documentation>
      A query to be sent to the service
    </xs:documentation>
  </xs:annotation>

  <xs:sequence>
    <xs:element name="ra" type="xs:double">
      <xs:annotation>
        <xs:documentation>
          the right ascension of the search cone's center in
          decimal degrees.
        </xs:documentation>
      </xs:annotation>
    </xs:element>

    <xs:element name="dec" type="xs:double">
      <xs:annotation>
        <xs:documentation>
          the declination of the search cone's center in
          decimal degrees.
        </xs:documentation>
      </xs:annotation>
    </xs:element>

    <xs:element name="sr" type="xs:double">
      <xs:annotation>
        <xs:documentation>
          the radius of the search cone in decimal degrees.
        </xs:documentation>
      </xs:annotation>
    </xs:element>

    <xs:element name="verb" type="xs:positiveInteger" minOccurs="0">
      <xs:annotation>
        <xs:documentation>
          the verbosity level to use where 1 means the bare
          minimum set of columns and 3 means the full set of
          available columns.
        </xs:documentation>
      </xs:annotation>
    </xs:element>

    <xs:element name="catalog" type="xs:string" minOccurs="0">
      <xs:annotation>
        <xs:documentation>
          the catalog to query.

```

```

        </xs:documentation>
        <xs:documentation>
            When the service can access more than one catalog,
            this input parameter, if available, is used to
            indicate which service to access.
        </xs:documentation>
    </xs:annotation>
</xs:element>

<xs:element name="extras" type="xs:string" minOccurs="0">
    <xs:annotation>
        <xs:documentation>
            any extra (non-standard) parameters that must be
            provided (apart from what is part of base URL given
            by the accessURL element).
        </xs:documentation>
        <xs:documentation>
            this value should be in the form of name=value
            pairs delimited with ampersands (&).
        </xs:documentation>
    </xs:annotation>
</xs:element>

</xs:sequence>
</xs:complexType>
</xs:schema>

```

A.2. The SIA XML Schema

The Complete SIA Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema"
    xmlns:vr="http://www.ivoa.net/xml/VOResource/v1.0"
    xmlns:vs="http://www.ivoa.net/xml/VODataService/v1.0"
    xmlns:sia="http://www.ivoa.net/xml/SIA/v1.0"
    xmlns:vm="http://www.ivoa.net/xml/VOMetadata/v0.1"
    targetNamespace="http://www.ivoa.net/xml/SIA/v1.0"
    elementFormDefault="unqualified" attributeFormDefault="unqualified"
    version="1.0">

    <xs:annotation>
        <xs:appinfo>
            <vm:schemaName>SIA</vm:schemaName>
            <vm:schemaPrefix>xs</vm:schemaPrefix>
            <vm:targetPrefix>sia</vm:targetPrefix>
        </xs:appinfo>
        <xs:documentation>
            Implementation of an XML Schema describing a Simple Image
            Access Service. Based on "The Simple Image Access Specification"
            by Doug Tody et al.
        </xs:documentation>
    </xs:annotation>

    <xs:import namespace="http://www.ivoa.net/xml/VOResource/v1.0"
        schemaLocation="http://www.ivoa.net/xml/VOResource/v1.0"/>
    <xs:import namespace="http://www.ivoa.net/xml/VODataService/v1.0"
        schemaLocation="http://www.ivoa.net/xml/VODataService/v1.0"/>

```

```

<xs:complexType name="SIACapRestriction" abstract="true">
  <xs:annotation>
    <xs:documentation>
      an abstract capability that fixes the standardID to the
      IVOA ID for the ConeSearch standard.
    </xs:documentation>
    <xs:documentation>
      See vr:Capability for documentation on inherited children.
    </xs:documentation>
  </xs:annotation>
  <xs:complexContent>
    <xs:restriction base="vr:Capability">
      <xs:sequence>
        <xs:element name="validationLevel" type="vr:Validation"
          minOccurs="0" maxOccurs="unbounded"/>
        <xs:element name="description" type="xs:token"
          minOccurs="0"/>
        <xs:element name="interface" type="vr:Interface"
          minOccurs="0" maxOccurs="unbounded"/>
      </xs:sequence>
      <xs:attribute name="standardID" type="vr:IdentifierURI"
        use="required" fixed="ivo://ivoa.net/std/SIA"/>
    </xs:restriction>
  </xs:complexContent>
</xs:complexType>

<xs:complexType name="SimpleImageAccess">
  <xs:annotation>
    <xs:documentation>
      The capabilities of an SIA implementation.
    </xs:documentation>
    <xs:documentation>
      Editor's Notes:
      * This is a prototype definition to
        illustrate how to extend the schema to a specific
        standard interface.
      * Staging information is not included yet.
    </xs:documentation>
  </xs:annotation>

  <xs:complexContent>
    <xs:extension base="sia:SIACapRestriction">
      <xs:sequence>
        <xs:element name="imageServiceType" type="sia:ImageServiceType">
          <xs:annotation>
            <xs:documentation>
              The class of image service: Cutout, Mosaic, Atlas, Pointed
            </xs:documentation>
          </xs:annotation>
        </xs:element>

        <xs:element name="maxQueryRegionSize" type="sia:SkySize">
          <xs:annotation>
            <xs:documentation>
              The maximum image query region size, expressed in
              decimal degrees. A value of 360 degrees indicates that
              there is no limit and the entire data collection
              (entire sky) can be queried.
            </xs:documentation>
          </xs:annotation>
        </xs:element>

        <xs:element name="maxImageExtent" type="sia:SkySize">

```

```

        <xs:annotation>
          <xs:documentation>
            The maximum image query region size, expressed in
            decimal degrees. A value of 360 degrees indicates
            that there is no limit and the entire data collection
            (entire sky) can be requested.
          </xs:documentation>
        </xs:annotation>
      </xs:element>

      <xs:element name="maxImageSize" type="sia:ImageSize">
        <xs:annotation>
          <xs:documentation>
            The largest image (in terms of pixels) that can be
            requested.
          </xs:documentation>
        </xs:annotation>
      </xs:element>

      <xs:element name="maxFileSize" type="xs:int">
        <xs:annotation>
          <xs:documentation>
            The maximum image file size in bytes.
          </xs:documentation>
        </xs:annotation>
      </xs:element>

      <xs:element name="maxRecords" type="xs:int">
        <xs:annotation>
          <xs:documentation>
            The largest number of records that the Image Query web
            method will return.
          </xs:documentation>
        </xs:annotation>
      </xs:element>

      <xs:element name="testQuery" type="sia:Query"
        minOccurs="0" maxOccurs="1">
        <xs:annotation>
          <xs:documentation>
            a set of query parameters that is expected
            to produce at least one matched record which
            can be used to test the service.
          </xs:documentation>
        </xs:annotation>
      </xs:element>

    </xs:sequence>
  </xs:extension>
</xs:complexContent>
</xs:complexType>

<xs:complexType name="SkySize">
  <xs:sequence>
    <xs:element name="long" type="xs:float">
      <xs:annotation>
        <xs:documentation>
          The maximum size in the longitude (R.A.) direction
        </xs:documentation>
      </xs:annotation>
    </xs:element>
    <xs:element name="lat" type="xs:float">
      <xs:annotation>

```

```

        <xs:documentation>
            The maximum size in the latitude (Dec.) direction
        </xs:documentation>
    </xs:annotation>
</xs:element>
</xs:sequence>
</xs:complexType>

<xs:complexType name="SkyPos">
    <xs:sequence>
        <xs:element name="long" type="xs:double">
            <xs:annotation>
                <xs:documentation>
                    The sky position in the longitude (R.A.) direction
                </xs:documentation>
            </xs:annotation>
        </xs:element>
        <xs:element name="lat" type="xs:double">
            <xs:annotation>
                <xs:documentation>
                    The sky position in the latitude (Dec.) direction
                </xs:documentation>
            </xs:annotation>
        </xs:element>
    </xs:sequence>
</xs:complexType>

<xs:complexType name="ImageSize">
    <xs:sequence>
        <xs:element name="long" type="xs:int">
            <xs:annotation>
                <xs:documentation>
                    The image size in the longitude (R.A.) direction in pixels
                </xs:documentation>
            </xs:annotation>
        </xs:element>
        <xs:element name="lat" type="xs:int">
            <xs:annotation>
                <xs:documentation>
                    The image size in the latitude (Dec.) direction in pixels
                </xs:documentation>
            </xs:annotation>
        </xs:element>
    </xs:sequence>
</xs:complexType>

<xs:simpleType name="ImageServiceType">
    <xs:annotation>
        <xs:documentation>
            The class of image service: Cutout, Mosaic, Atlas, Pointed
        </xs:documentation>
    </xs:annotation>

    <xs:restriction base="xs:token">

        <xs:enumeration value="Cutout">
            <xs:annotation>
                <xs:documentation>
                    This is a service which extracts or "cuts out" rectangular
                    regions of some larger image, returning an image of the
                    requested size to the client. Such images are usually drawn
                    from a database or a collection of survey images that cover
                    some large portion of the sky. To be considered a cutout
                </xs:documentation>
            </xs:annotation>
        </xs:enumeration>
    </xs:restriction>
</xs:simpleType>

```

service, the returned image should closely approximate (or at least not exceed) the size of the requested region; however, a cutout service will not normally resample (rescale or reproject) the pixel data. A cutout service may mosaic image segments to cover a large region but is still considered a cutout service if it does not resample the data. Image cutout services are fast and avoid image degradation due to resampling.

```
</xs:documentation>
```

```
</xs:annotation>
```

```
</xs:enumeration>
```

```
<xs:enumeration value="Mosaic">
```

```
<xs:annotation>
```

```
<xs:documentation>
```

This service is similar to the image cutout service but adds the capability to compute an image of the size, scale, and projection specified by the client. Mosaic services include services which resample and reproject existing image data, as well as services which generate pixels from some more fundamental dataset, e.g., a high energy event list or a radio astronomy measurement set. Image mosaics can be expensive to generate for large regions but they make it easier for the client to overlay image data from different sources. Image mosaicing services which resample already pixelated data will degrade the data slightly, unlike the simpler cutout service which returns the data unchanged.

```
</xs:documentation>
```

```
</xs:annotation>
```

```
</xs:enumeration>
```

```
<xs:enumeration value="Atlas">
```

```
<xs:annotation>
```

```
<xs:documentation>
```

This category of service provides access to pre-computed images that make up a survey of some large portion of the sky. The service, however, is not capable of dynamically cutting out requested regions, and the size of atlas images is predetermined by the survey. Atlas images may range in size from small cutouts of extended objects to large calibrated survey data frames.

```
</xs:documentation>
```

```
</xs:annotation>
```

```
</xs:enumeration>
```

```
<xs:enumeration value="Pointed">
```

```
<xs:annotation>
```

```
<xs:documentation>
```

This category of service provides access to collections of images of many small, "pointed" regions of the sky. "Pointed" images normally focus on specific sources in the sky as opposed to being part of a sky survey. This type of service usually applies to instrumental archives from observatories with guest observer programs (e.g., the HST archive) and other general purpose image archives (e.g., the ADIL). If a service provides access to both survey and pointed images, then it should be considered a Pointed Image Archive for the purposes of this specification; if a differentiation between the

```

        types of data is desired the pointed and survey data
        collections should be registered as separate image
        services.
    </xs:documentation>
</xs:annotation>
</xs:enumeration>

</xs:restriction>
</xs:simpleType>

<xs:complexType name="Query">
  <xs:annotation>
    <xs:documentation>
      A query to be sent to the service
    </xs:documentation>
  </xs:annotation>

  <xs:sequence>
    <xs:element name="pos" type="sia:SkyPos" minOccurs="0">
      <xs:annotation>
        <xs:documentation>
          the right ascension of the search cone's center in
          decimal degrees.
        </xs:documentation>
      </xs:annotation>
    </xs:element>

    <xs:element name="size" type="sia:SkySize" minOccurs="0">
      <xs:annotation>
        <xs:documentation>
          the declination of the search cone's center in
          decimal degrees.
        </xs:documentation>
      </xs:annotation>
    </xs:element>

    <xs:element name="verb" type="xs:positiveInteger" minOccurs="0">
      <xs:annotation>
        <xs:documentation>
          the verbosity level to use where 0 means the bare
          minimum set of columns and 3 means the full set of
          available columns.
        </xs:documentation>
      </xs:annotation>
    </xs:element>

    <xs:element name="extras" type="xs:string" minOccurs="0">
      <xs:annotation>
        <xs:documentation>
          any extra (particularly non-standard) parameters that must
          be provided (apart from what is part of base URL given by
          the accessURL element).
        </xs:documentation>
        <xs:documentation>
          this value should be in the form of name=value
          pairs delimited with ampersands (&).
        </xs:documentation>
      </xs:annotation>
    </xs:element>

  </xs:sequence>
</xs:complexType>
</xs:schema>

```

A.3 The SSA XML Schema

The Complete SSA Schema

```
<?xml version="1.0" encoding="UTF-8"?>
<xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema"
  xmlns:vr="http://www.ivoa.net/xml/VOResource/v1.0"
  xmlns:vs="http://www.ivoa.net/xml/VODataService/v1.0"
  xmlns:ssap="http://www.ivoa.net/xml/SSA/v1.0"
  xmlns:vm="http://www.ivoa.net/xml/VOMetadata/v0.1"
  targetNamespace="http://www.ivoa.net/xml/SSA/v1.0"
  elementFormDefault="unqualified" attributeFormDefault="unqualified"
  version="1.0">

  <xs:annotation>
    <xs:appinfo>
      <vm:schemaName>SSA</vm:schemaName>
      <vm:schemaPrefix>xs</vm:schemaPrefix>
      <vm:targetPrefix>ssap</vm:targetPrefix>
    </xs:appinfo>
    <xs:documentation>
      XML Schema used to describe the capabilities of a service instance
      conforming to the Simple Spectral Access (SSA) protocol.
    </xs:documentation>
  </xs:annotation>

  <xs:import namespace="http://www.ivoa.net/xml/VOResource/v1.0"
    schemaLocation="http://www.ivoa.net/xml/VOResource/v1.0"/>
  <xs:import namespace="http://www.ivoa.net/xml/VODataService/v1.0"
    schemaLocation="http://www.ivoa.net/xml/VODataService/v1.0"/>

  <!-- Set the Capability standardID to indicate the SSA protocol. -->
  <xs:complexType name="SSACapRestriction" abstract="true">
    <xs:annotation>
      <xs:documentation>
        An abstract capability that fixes the standardID to the
        IVOA ID for the SSA standard.
      </xs:documentation>
      <xs:documentation>
        See vr:Capability for documentation on inherited children.
      </xs:documentation>
    </xs:annotation>

    <xs:complexContent>
      <xs:restriction base="vr:Capability">
        <xs:sequence>
          <xs:element name="validationLevel" type="vr:Validation"
            minOccurs="0" maxOccurs="unbounded"/>
          <xs:element name="description" type="xs:token"
            minOccurs="0"/>
          <xs:element name="interface" type="vr:Interface"
            minOccurs="0" maxOccurs="unbounded"/>
        </xs:sequence>
        <xs:attribute name="standardID" type="vr:IdentifierURI"
          use="required" fixed="ivo://ivoa.net/std/SSA"/>
      </xs:restriction>
    </xs:complexContent>
  </xs:complexType>

  <!-- SSA Capabilities -->
  <xs:complexType name="SimpleSpectralAccess">
```



```

<xs:annotation>
  <xs:documentation>
    The capabilities of an SSA service implementation.
  </xs:documentation>
</xs:annotation>

<xs:complexContent>
  <xs:extension base="ssap:SSACapRestriction">
    <xs:sequence>

      <xs:element name="complianceLevel" type="ssap:ComplianceLevel">
        <xs:annotation>
          <xs:documentation>
            The category indicating the level to which
            this instance complies with the SSA standard.
          </xs:documentation>
          <xs:documentation>
            Allowed values are "query", "minimal", and "full".
            See definitions of allowed values for details.
          </xs:documentation>
        </xs:annotation>
      </xs:element>

      <xs:element name="dataSource" type="ssap:DataSource"
        minOccurs="1" maxOccurs="unbounded">
        <xs:annotation>
          <xs:documentation>
            The category specifying where the data originally
            came from.
          </xs:documentation>
          <xs:documentation>
            Allowed values are "survey", "pointed", "custom",
            "theory", "artificial"
          </xs:documentation>
        </xs:annotation>
      </xs:element>

      <xs:element name="creationType" type="ssap:CreationType"
        minOccurs="1" maxOccurs="unbounded">
        <xs:annotation>
          <xs:documentation>
            The category that describes the process used to
            produce the dataset.
          </xs:documentation>
          <xs:documentation>
            Typically this describes only the processing
            performed by the data service, but it could
            describe some additional earlier processing as
            well, e.g., if data is partially precomputed.
          </xs:documentation>
          <xs:documentation>
            Allowed values are "archival", "cutout", "filtered",
            "mosaic", "projection", "spectralExtraction",
            "catalogExtraction"
          </xs:documentation>
        </xs:annotation>
      </xs:element>

      <xs:element name="supportedFrame" type="ssap:SupportedFrame"
        minOccurs="1" maxOccurs="unbounded">
        <xs:annotation>
          <xs:documentation>
            The STC name for a world coordinate system
  
```

```

        frame supported by this service.
    </xs:documentation>
    <xs:documentation>
        At least one recognized value must be listed.
        With SSA v1.1, ICRS must be supported; thus,
        this list must include at least this value.
    </xs:documentation>
</xs:annotation>
</xs:element>

<xs:element name="maxSearchRadius" type="xs:double">
    <xs:annotation>
        <xs:documentation>
            The largest search radius, in degrees, that will be
            accepted by the service without returning an error
            condition.
        </xs:documentation>
        <xs:documentation>
            Use 180.0 if there is no restriction.
        </xs:documentation>
    </xs:annotation>
</xs:element>

<xs:element name="maxRecords" type="xs:int">
    <xs:annotation>
        <xs:documentation>
            The hard limit on the largest number of records that
            the query operation will return in a single response
        </xs:documentation>
    </xs:annotation>
</xs:element>

<xs:element name="defaultMaxRecords" type="xs:int">
    <xs:annotation>
        <xs:documentation>
            The largest number of records that the service will
            return when the MAXREC parameter not specified
            in the query input.
        </xs:documentation>
    </xs:annotation>
</xs:element>

<xs:element name="maxAperture" type="xs:double"
    minOccurs="0">
    <xs:annotation>
        <xs:documentation>
            The largest aperture that can be supported upon
            request via the APERTURE input parameter by a
            service that supports the special extraction
            creation method.
        </xs:documentation>
        <xs:documentation>
            A value of 180 (the default) means there is no
            theoretical limit.
        </xs:documentation>
    </xs:annotation>
</xs:element>

<xs:element name="maxFileSize" type="xs:int"
    maxOccurs="1" minOccurs="0">
    <xs:annotation>
        <xs:documentation>
            The maximum image file size in bytes.

```

```

        </xs:documentation>
    </xs:annotation>
</xs:element>

<xs:element name="testQuery" type="ssap:Query"
    minOccurs="0" maxOccurs="1">
    <xs:annotation>
        <xs:documentation>
            a set of query parameters that is expected to
            produce at least one matched record which can be
            used to test the service.
        </xs:documentation>
    </xs:annotation>
</xs:element>

    </xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>

<xs:simpleType name="ComplianceLevel">
    <xs:annotation>
        <xs:documentation>
            The allowed values for indicating the level at which a
            service instance complies with the SSA standard.
        </xs:documentation>
    </xs:annotation>

    <xs:restriction base="xs:token">
        <xs:enumeration value="query">
            <xs:annotation>
                <xs:documentation>
                    The service supports all of the capabilities and features
                    of the SSA protocol identified as "must" in the
                    specification, except that it does not support returning
                    data in at least one SSA-compliant format.
                </xs:documentation>
            <xs:documentation>
                This level represents the lowest level of compliance.
            </xs:documentation>
        </xs:annotation>
    </xs:enumeration>

    <xs:enumeration value="minimal">
        <xs:annotation>
            <xs:documentation>
                The service supports all of the capabilities and features
                of the SSA protocol identified as "must" in the
                specification.
            </xs:documentation>
            <xs:documentation>
                In brief, this includes:
                * implementing the GET interface,
                * support the parameters POS, SIZE, TOME, BAND, and
                  FORMAT
                * includes all mandatory metadata fields in query
                  response
                * supports getData method retrieval in at least one
                  SSA-compliant format
                * supports the "FORMAT=METADATA" metadata query.
            </xs:documentation>
        </xs:annotation>
    </xs:enumeration>
        <xs:documentation>
            This level represents the middle level of compliance.
        </xs:documentation>
    </xs:enumeration>

```

```

        </xs:documentation>
    </xs:annotation>
</xs:enumeration>

<xs:enumeration value="full">
    <xs:annotation>
        <xs:documentation>
            The service supports all of the capabilities and features
            of the SSA protocol identified as "must" or "should" in the
            specification.
        </xs:documentation>
        <xs:documentation>
            This level represents the highest level of compliance.
        </xs:documentation>
    </xs:annotation>
</xs:enumeration>
</xs:restriction>
</xs:simpleType>

<xs:simpleType name="DataSource">
    <xs:annotation>
        <xs:documentation>
            The defined categories that specify where the spectral data
            originally came from.
        </xs:documentation>
    </xs:annotation>

    <xs:restriction base="xs:token">
        <xs:enumeration value="survey">
            <xs:annotation>
                <xs:documentation>
                    A survey dataset, which typically covers some region of
                    observational parameter space in a uniform fashion, with
                    as complete as possible coverage in the region of parameter
                    space observed.
                </xs:documentation>
            </xs:annotation>
        </xs:enumeration>

        <xs:enumeration value="pointed">
            <xs:annotation>
                <xs:documentation>
                    A pointed observation of a particular astronomical object
                    or field.
                </xs:documentation>
                <xs:documentation>
                    Typically, these are instrumental observations taken as
                    part of some PI observing program. The data quality and
                    characteristics may be variable, but the observations of
                    a particular object or field may be more extensive than
                    for a survey.
                </xs:documentation>
            </xs:annotation>
        </xs:enumeration>

        <xs:enumeration value="custom">
            <xs:annotation>
                <xs:documentation>
                    Data which has been custom processed, e.g., as part of
                    a specific research project.
                </xs:documentation>
            </xs:annotation>
        </xs:enumeration>
    </xs:restriction>
</xs:simpleType>

```

```

<xs:enumeration value="theory">
  <xs:annotation>
    <xs:documentation>
      Theory data, or any data generated from a theoretical
      model, for example a synthetic spectrum.
    </xs:documentation>
  </xs:annotation>
</xs:enumeration>

<xs:enumeration value="artificial">
  <xs:annotation>
    <xs:documentation>
      Artificial or simulated data.
    </xs:documentation>
    <xs:documentation>
      This is similar to theory data but need not be based on
      a physical model, and is often used for testing purposes.
    </xs:documentation>
  </xs:annotation>
</xs:enumeration>

</xs:restriction>
</xs:simpleType>

<xs:simpleType name="CreationType">
  <xs:restriction base="xs:token">
    <xs:enumeration value="archival">
      <xs:annotation>
        <xs:documentation>
          The entire archival or project dataset is returned.
          Transformations such as metadata or data model mediation
          or format conversions may take place, but the content of
          the dataset is not substantially modified (e.g., all the
          data is returned and the sample values are not modified).
        </xs:documentation>
      </xs:annotation>
    </xs:enumeration>

    <xs:enumeration value="cutout">
      <xs:annotation>
        <xs:documentation>
          The dataset is subsetted in some region of parameter
          space to produce a subset dataset. Sample values are not
          modified, e.g., cutouts could be recombined to reconstitute
          the original dataset.
        </xs:documentation>
      </xs:annotation>
    </xs:enumeration>

    <xs:enumeration value="filtered">
      <xs:annotation>
        <xs:documentation>
          The data is filtered in some fashion to exclude portions
          of the dataset, e.g., passing only data in selected regions
          along a measurement axis, or processing the data in a way
          which recomputes the sample values, e.g., due to
          interpolation or flux transformation.
        </xs:documentation>
        <xs:documentation>
          Filtering is often
          combined with other forms of processing, e.g., projection.
        </xs:documentation>
      </xs:annotation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>

```

```

    </xs:annotation>
  </xs:enumeration>

  <xs:enumeration value="mosaic">
    <xs:annotation>
      <xs:documentation>
        Data from multiple non- or partially-overlapping datasets
        are combined to produce a new dataset.
      </xs:documentation>
    </xs:annotation>
  </xs:enumeration>

  <xs:enumeration value="projection">
    <xs:annotation>
      <xs:documentation>
        Data is geometrically warped or dimensionally reduced by
        projecting through a multidimensional dataset.
      </xs:documentation>
    </xs:annotation>
  </xs:enumeration>

  <xs:enumeration value="specialExtraction">
    <xs:annotation>
      <xs:documentation>
        Extraction of a spectrum from another dataset, e.g.,
        extraction of a spectrum from a spectral data cube
        through a simulated aperture.
      </xs:documentation>
    </xs:annotation>
  </xs:enumeration>

  <xs:enumeration value="catalogExtraction">
    <xs:annotation>
      <xs:documentation>
        Extraction of a catalog of some form from another dataset,
        e.g., extraction of a source catalog from an image, or
        extraction of a line list catalog from a spectrum (not
        valid for a SSA service).
      </xs:documentation>
    </xs:annotation>
  </xs:enumeration>

  </xs:restriction>
</xs:simpleType>

<xs:simpleType name="SupportedFrame">
  <xs:annotation>
    <xs:documentation>
      A controlled list of space-time reference frame names
      defined from Table 3 (S 4.4.1.2.3) of the STC spec.
    </xs:documentation>
  </xs:annotation>

  <xs:restriction base="xs:token">
    <xs:enumeration value="FK4">
      <xs:annotation>
        <xs:documentation>
          the Fundamental Katalog, system 4, frame; Besselian
        </xs:documentation>
      <xs:documentation>
        Spectrum data files will require a specification of
        the equinox; if it is not expressed explicitly,
        B1950.0 should be assumed.
      </xs:documentation>
    </xs:enumeration>
  </xs:restriction>
</xs:simpleType>

```

```
        </xs:documentation>
    </xs:annotation>
</xs:enumeration>

<xs:enumeration value="FK5">
    <xs:annotation>
        <xs:documentation>
            the Fundamental Katalog, system 5, frame; Julien
        </xs:documentation>
        <xs:documentation>
            Spectrum data files will require a specification of
            the equinox; if it is not expressed explicitly,
            J2000.0 should be assumed.
        </xs:documentation>
    </xs:annotation>
</xs:enumeration>

<xs:enumeration value="ECLIPTIC">
    <xs:annotation>
        <xs:documentation>
            Ecliptic coordinates
        </xs:documentation>
    </xs:annotation>
</xs:enumeration>

<xs:enumeration value="ICRS">
    <xs:annotation>
        <xs:documentation>
            International Celestial Reference System
        </xs:documentation>
    </xs:annotation>
</xs:enumeration>

<xs:enumeration value="GALACTIC_I">
    <xs:annotation>
        <xs:documentation>
            old Galactic coordinates
        </xs:documentation>
    </xs:annotation>
</xs:enumeration>

<xs:enumeration value="GALACTIC_II">
    <xs:annotation>
        <xs:documentation>
            old Galactic coordinates
        </xs:documentation>
    </xs:annotation>
</xs:enumeration>

<xs:enumeration value="SUPER_GALACTIC">
    <xs:annotation>
        <xs:documentation>
            Super-galactic coordinates with the north pole at
            GALACTIC_II (47.37, +6.32) and the origin at
            GALACTIC_II (137.37, 0).
        </xs:documentation>
    </xs:annotation>
</xs:enumeration>

<xs:enumeration value="AZ_EL">
    <xs:annotation>
        <xs:documentation>
            The local azimuth and elevation frame where azimuth
```

```

        increases from north through east.
    </xs:documentation>
</xs:annotation>
</xs:enumeration>

<xs:enumeration value="BODY">
    <xs:annotation>
        <xs:documentation>
            A generic solar system body-centered coordinate frame
        </xs:documentation>
        <xs:documentation>
            If applicable, queries against this system should assume a
            default magnitude value or range in the absence of an
            applicable (non-standard) query constraint. Service
            providers are encouraged to document the such assumptions
            in the resource or capability description.
        </xs:documentation>
    </xs:annotation>
</xs:enumeration>

<xs:enumeration value="GEO_C">
    <xs:annotation>
        <xs:documentation>
            3D Geographic (geocentric) coordinates where the magnitude
            is expressed as a geocentric distance
        </xs:documentation>
        <xs:documentation>
            If applicable, queries against this system should assume a
            default magnitude value or range in the absence of an
            applicable (non-standard) query constraint. Service
            providers are encouraged to document the such assumptions
            in the resource or capability description.
        </xs:documentation>
    </xs:annotation>
</xs:enumeration>

<xs:enumeration value="GEO_D">
    <xs:annotation>
        <xs:documentation>
            3D Geographic (geocentric) coordinates where the magnitude
            is expressed as an elevation above sea-level.
        </xs:documentation>
        <xs:documentation>
            If applicable, queries against this system should assume a
            default magnitude value or range in the absence of an
            applicable (non-standard) query constraint. Service
            providers are encouraged to document the such assumptions
            in the resource or capability description.
        </xs:documentation>
        <xs:documentation>
            Semi-major axis and inverse flattening of the
            reference spheroid may need to be assumed; a
            default as defined by the IAU 1976 is recommended.
        </xs:documentation>
    </xs:annotation>
</xs:enumeration>

<xs:enumeration value="MAG">
    <xs:annotation>
        <xs:documentation>
            Geomagnetic coordinates.
        </xs:documentation>
        <xs:documentation>

```



```

        See Franz and Harper 2002, Planetary and Space
        Science, vol 50, p. 217.
    </xs:documentation>
    <xs:documentation>
        If applicable, queries against this system should assume a
        default magnitude value or range in the absence of an
        applicable (non-standard) query constraint. Service
        providers are encouraged to document the such assumptions
        in the resource or capability description.
    </xs:documentation>
    </xs:annotation>
</xs:enumeration>

<xs:enumeration value="GSE">
    <xs:annotation>
        <xs:documentation>
            Geocentric Solar Ecliptic coordinates
        </xs:documentation>
        <xs:documentation>
            See Franz and Harper 2002, Planetary and Space
            Science, vol 50, p. 217.
        </xs:documentation>
    </xs:annotation>
</xs:enumeration>

<xs:enumeration value="GSM">
    <xs:annotation>
        <xs:documentation>
            Geocentric Solar Magnetic coordinates
        </xs:documentation>
        <xs:documentation>
            See Franz and Harper 2002, Planetary and Space
            Science, vol 50, p. 217.
        </xs:documentation>
    </xs:annotation>
</xs:enumeration>

<xs:enumeration value="HGC">
    <xs:annotation>
        <xs:documentation>
            Heliographic coordinates (Carrington)
        </xs:documentation>
        <xs:documentation>
            See Thompson 2006, "Coordinate Systems for Solar
            Image Data", A&A., Section 2.2
        </xs:documentation>
    </xs:annotation>
</xs:enumeration>

<xs:enumeration value="HGS">
    <xs:annotation>
        <xs:documentation>
            Heliographic coordinates (Stonyhurst)
        </xs:documentation>
        <xs:documentation>
            See Thompson 2006, "Coordinate Systems for Solar
            Image Data", A&A., Section 2.2
        </xs:documentation>
    </xs:annotation>
</xs:enumeration>

<xs:enumeration value="HEEQ">
    <xs:annotation>

```

```

    <xs:documentation>
      Heliographic Earth Equatorial coordinates
    </xs:documentation>
  <xs:documentation>
    See Franz and Harper 2002, Planetary and Space
    Science, vol 50, p. 217, and
    Thompson 2006, "Coordinate Systems for Solar
    Image Data", A&A., Section 2.1
  </xs:documentation>
</xs:annotation>
</xs:enumeration>

<xs:enumeration value="HRTN">
  <xs:annotation>
    <xs:documentation>
      Heliographic Radial-Tangential-Normal coordinates
    </xs:documentation>
    <xs:documentation>
      See Franz and Harper 2002, Planetary and Space
      Science, vol 50, p. 217.
    </xs:documentation>
  </xs:annotation>
</xs:enumeration>

<xs:enumeration value="HPC">
  <xs:annotation>
    <xs:documentation>
      Helioprojective Cartesian coordinates
    </xs:documentation>
    <xs:documentation>
      See Thompson 2006, "Coordinate Systems for Solar
      Image Data", A&A., Section 2.1
    </xs:documentation>
  </xs:annotation>
</xs:enumeration>

<xs:enumeration value="HPR">
  <xs:annotation>
    <xs:documentation>
      Helioprojective Polar coordinates
    </xs:documentation>
    <xs:documentation>
      See Thompson 2006, "Coordinate Systems for Solar
      Image Data", A&A., Section 2.1
    </xs:documentation>
  </xs:annotation>
</xs:enumeration>

<xs:enumeration value="HCC">
  <xs:annotation>
    <xs:documentation>
      Heliocentric Cartesian coordinates
    </xs:documentation>
    <xs:documentation>
      See Thompson 2006, "Coordinate Systems for Solar
      Image Data", A&A., Section 2.1
    </xs:documentation>
  </xs:annotation>
</xs:enumeration>

<xs:enumeration value="HGI">
  <xs:annotation>
    <xs:documentation>

```

```
        Heliographic Inertial coordinates
    </xs:documentation>
    <xs:documentation>
        See Franz and Harper 2002, Planetary and Space
        Science, vol 50, p. 217.
    </xs:documentation>
</xs:annotation>
</xs:enumeration>

<xs:enumeration value="MERCURY_C">
    <xs:annotation>
        <xs:documentation>
            Planteocentric coordinates on Mercury
        </xs:documentation>
    </xs:annotation>
</xs:enumeration>

<xs:enumeration value="VENUS_C">
    <xs:annotation>
        <xs:documentation>
            Planteocentric coordinates on Venus
        </xs:documentation>
    </xs:annotation>
</xs:enumeration>

<xs:enumeration value="LUNA_C">
    <xs:annotation>
        <xs:documentation>
            Selenocentric coordinates (for the Moon)
        </xs:documentation>
    </xs:annotation>
</xs:enumeration>

<xs:enumeration value="MARS_C">
    <xs:annotation>
        <xs:documentation>
            Planteocentric coordinates on Mars
        </xs:documentation>
    </xs:annotation>
</xs:enumeration>

<xs:enumeration value="JUPITER_C_III">
    <xs:annotation>
        <xs:documentation>
            Planteocentric coordinates on Jupiter, system III
        </xs:documentation>
    </xs:annotation>
</xs:enumeration>

<xs:enumeration value="SATURN_C_III">
    <xs:annotation>
        <xs:documentation>
            Planteocentric coordinates on Saturn, system III
        </xs:documentation>
    </xs:annotation>
</xs:enumeration>

<xs:enumeration value="URANUS_C_III">
    <xs:annotation>
        <xs:documentation>
            Planteocentric coordinates on Uranus, system III
        </xs:documentation>
    </xs:annotation>
</xs:enumeration>
```

```
</xs:enumeration>

<xs:enumeration value="NEPTUNE_C_III">
  <xs:annotation>
    <xs:documentation>
      Planteocentric coordinates on Neptune, system III
    </xs:documentation>
  </xs:annotation>
</xs:enumeration>

<xs:enumeration value="PLUTO_C">
  <xs:annotation>
    <xs:documentation>
      Planteocentric coordinates on Mercury
    </xs:documentation>
  </xs:annotation>
</xs:enumeration>

<xs:enumeration value="MERCURY_G">
  <xs:annotation>
    <xs:documentation>
      Planteographic coordinates on Mercury
    </xs:documentation>
  </xs:annotation>
</xs:enumeration>

<xs:enumeration value="VENUS_G">
  <xs:annotation>
    <xs:documentation>
      Planteographic coordinates on Venus
    </xs:documentation>
  </xs:annotation>
</xs:enumeration>

<xs:enumeration value="LUNA_G">
  <xs:annotation>
    <xs:documentation>
      Selenographic coordinates (for the Moon)
    </xs:documentation>
  </xs:annotation>
</xs:enumeration>

<xs:enumeration value="MARS_G">
  <xs:annotation>
    <xs:documentation>
      Planteographic coordinates on Mars
    </xs:documentation>
  </xs:annotation>
</xs:enumeration>

<xs:enumeration value="JUPITER_G_III">
  <xs:annotation>
    <xs:documentation>
      Planteographic coordinates on Jupiter, system III
    </xs:documentation>
  </xs:annotation>
</xs:enumeration>

<xs:enumeration value="SATURN_G_III">
  <xs:annotation>
    <xs:documentation>
      Planteographic coordinates on Saturn, system III
    </xs:documentation>
  </xs:annotation>
</xs:enumeration>
```

```

    </xs:annotation>
</xs:enumeration>

<xs:enumeration value="URANUS_G_III">
  <xs:annotation>
    <xs:documentation>
      Planteographic coordinates on Uranus, system III
    </xs:documentation>
  </xs:annotation>
</xs:enumeration>

<xs:enumeration value="NEPTUNE_G_III">
  <xs:annotation>
    <xs:documentation>
      Planteographic coordinates on Neptune, system III
    </xs:documentation>
  </xs:annotation>
</xs:enumeration>

<xs:enumeration value="PLUTO_G">
  <xs:annotation>
    <xs:documentation>
      Planteographic coordinates on Mercury
    </xs:documentation>
  </xs:annotation>
</xs:enumeration>

<xs:enumeration value="UNKNOWN">
  <xs:annotation>
    <xs:documentation>
      a frame that is either unknown or non-standard
    </xs:documentation>
    <xs:documentation>
      Any available descriptive details should be
      given (or referenced) in the capability's description.
    </xs:documentation>
  </xs:annotation>
</xs:enumeration>

</xs:restriction>
</xs:simpleType>

<xs:complexType name="Query">
  <xs:annotation>
    <xs:documentation>
      A query to be sent to the service
    </xs:documentation>
  </xs:annotation>

  <xs:sequence>
    <xs:element name="pos" type="ssap:PosParam" minOccurs="0">
      <xs:annotation>
        <xs:documentation>
          the center position the search cone given in
          decimal degrees.
        </xs:documentation>
      </xs:annotation>
    </xs:element>

    <xs:element name="size" type="xs:double" minOccurs="0">
      <xs:annotation>
        <xs:documentation>
          the size of the search radius.
        </xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
</xs:complexType>

```

```

        </xs:documentation>
    </xs:annotation>
</xs:element>

<xs:element name="queryDataCmd" type="xs:string" minOccurs="0">
    <xs:annotation>
        <xs:documentation>
            Fully specified test query formatted as an URL
            argument list in the syntax specified by the SSA standard.
            The list must exclude the REQUEST argument which is
            assumed to be set to "queryData".
        </xs:documentation>
        <xs:documentation>
            This value must be in the form of name=value
            pairs delimited with ampersands (&). A query
            may then be formed by appending to the base URL the
            request argument, "REQUEST=queryData&", followed
            by the contents of this element.
        </xs:documentation>
    </xs:annotation>
</xs:element>
</xs:sequence>
</xs:complexType>

<xs:complexType name="PosParam">
    <xs:annotation>
        <xs:documentation>
            a position in the sky to search.
        </xs:documentation>
    </xs:annotation>

    <xs:sequence>
        <xs:element name="long" type="xs:double" minOccurs="0">
            <xs:annotation>
                <xs:documentation>
                    The longitude (e.g. Right Ascension) of the center of the
                    search position in decimal degrees.
                </xs:documentation>
            </xs:annotation>
        </xs:element>

        <xs:element name="lat" type="xs:double" minOccurs="0">
            <xs:annotation>
                <xs:documentation>
                    The latitude (e.g. Declination) of the center of the
                    search position in decimal degrees.
                </xs:documentation>
            </xs:annotation>
        </xs:element>

        <xs:element name="refframe" type="xs:token" minOccurs="0">
            <xs:annotation>
                <xs:documentation>
                    the coordinate system reference frame name indicating
                    the frame to assume for the given position. If not
                    provided, ICRS is assumed.
                </xs:documentation>
            </xs:annotation>
        </xs:element>
    </xs:sequence>
</xs:complexType>

<!--

```

```

- a separate type for pre-v1.0 compliant spectral services.
-->
<xs:complexType name="ProtoSpectralAccess">
  <xs:annotation>
    <xs:documentation>
      The capabilities of an proto-SSA service implementation.
      Clients may assume a particular interface for this type of
      service based on historical convention; however, no
      guarantees are made that the service is compliant with any
      IVOA standard.
    </xs:documentation>
    <xs:documentation>
      This capability is for spectral access services developed
      prior to the completion of the SSA standard and,
      therefore, are not compliant with that standard.
    </xs:documentation>
  </xs:annotation>

  <xs:complexContent>
    <xs:extension base="ssap:SSACapRestriction">
      <xs:sequence>

        <xs:element name="dataSource" type="ssap:DataSource"
          minOccurs="1" maxOccurs="unbounded">
          <xs:annotation>
            <xs:documentation>
              The category specifying where the data originally
              came from.
            </xs:documentation>
            <xs:documentation>
              Allowed values are "survey", "pointed", "custom",
              "theory", "artificial"
            </xs:documentation>
          </xs:annotation>
        </xs:element>

        <xs:element name="creationType" type="ssap:CreationType"
          minOccurs="1" maxOccurs="unbounded">
          <xs:annotation>
            <xs:documentation>
              The category that describes the process used to
              produce the dataset.
            </xs:documentation>
            <xs:documentation>
              Typically this describes only the processing
              performed by the data service, but it could
              describe some additional earlier processing as
              well, e.g., if data is partially precomputed.
            </xs:documentation>
            <xs:documentation>
              Allowed values are "archival", "cutout", "filtered",
              "mosaic", "projection", "spectralExtraction",
              "catalogExtraction"
            </xs:documentation>
          </xs:annotation>
        </xs:element>

        <xs:element name="maxSearchRadius" type="xs:double">
          <xs:annotation>
            <xs:documentation>
              The largest search radius, in degrees, that will be
              accepted by the service without returning an error
              condition.
            </xs:documentation>
          </xs:annotation>
        </xs:element>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>

```

```

        </xs:documentation>
        <xs:documentation>
            Use 180.0 if there is no restriction.
        </xs:documentation>
    </xs:annotation>
</xs:element>

<xs:element name="maxRecords" type="xs:int">
    <xs:annotation>
        <xs:documentation>
            The hard limit on the largest number of records that
            the query operation will return in a single response
        </xs:documentation>
    </xs:annotation>
</xs:element>

<xs:element name="defaultMaxRecords" type="xs:int">
    <xs:annotation>
        <xs:documentation>
            The largest number of records that the service will
            return when the MAXREC parameter not specified
            in the query input.
        </xs:documentation>
    </xs:annotation>
</xs:element>

<xs:element name="maxAperture" type="xs:double"
    minOccurs="0">
    <xs:annotation>
        <xs:documentation>
            The largest aperture that can be supported upon
            request via the APERTURE input parameter by a
            service that supports the special extraction
            creation method.
        </xs:documentation>
        <xs:documentation>
            A value of 180 (the default) means there is no
            theoretical limit.
        </xs:documentation>
    </xs:annotation>
</xs:element>

<xs:element name="maxFileSize" type="xs:int"
    maxOccurs="1" minOccurs="0">
    <xs:annotation>
        <xs:documentation>
            The maximum image file size in bytes.
        </xs:documentation>
    </xs:annotation>
</xs:element>

<xs:element name="testQuery" type="ssap:Query"
    minOccurs="0" maxOccurs="1">
    <xs:annotation>
        <xs:documentation>
            a set of query parameters that is expected to
            produce at least one matched record which can be
            used to test the service.
        </xs:documentation>
    </xs:annotation>
</xs:element>
</xs:sequence>

```



```

    </xs:extension>
  </xs:complexContent>
</xs:complexType>

</xs:schema>

```

A.4. The SLAP XML Schema

The Complete SLA Schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema"
  xmlns:vr="http://www.ivoa.net/xml/VOResource/v1.0"
  xmlns:vs="http://www.ivoa.net/xml/VODataService/v1.0"
  xmlns:slap="http://www.ivoa.net/xml/SLAP/v1.0"
  xmlns:vm="http://www.ivoa.net/xml/VOMetadata/v0.1"
  targetNamespace="http://www.ivoa.net/xml/SLAP/v1.0"
  elementFormDefault="unqualified" attributeFormDefault="unqualified"
  version="1.0">

  <xs:annotation>
    <xs:appinfo>
      <vm:schemaName>SLAP</vm:schemaName>
      <vm:schemaPrefix>xs</vm:schemaPrefix>
      <vm:targetPrefix>slap</vm:targetPrefix>
    </xs:appinfo>
    <xs:documentation>
      XML Schema used to describe the capabilities of a service instance
      conforming to the Simple Line Access Protocol (SLAP).
    </xs:documentation>
  </xs:annotation>

  <xs:import namespace="http://www.ivoa.net/xml/VOResource/v1.0"
    schemaLocation="http://www.ivoa.net/xml/VOResource/v1.0"/>
  <xs:import namespace="http://www.ivoa.net/xml/VODataService/v1.0"
    schemaLocation="http://www.ivoa.net/xml/VODataService/v1.0"/>

  <!-- Set the Capability standardID to indicate the SLAP protocol. -->
  <xs:complexType name="SLAPCapRestriction" abstract="true">
    <xs:annotation>
      <xs:documentation>
        An abstract capability that fixes the standardID to the
        IVOA ID for the SLAP standard.
      </xs:documentation>
      <xs:documentation>
        See vr:Capability for documentation on inherited children.
      </xs:documentation>
    </xs:annotation>

    <xs:complexContent>
      <xs:restriction base="vr:Capability">
        <xs:sequence>
          <xs:element name="validationLevel" type="vr:Validation"
            minOccurs="0" maxOccurs="unbounded"/>
          <xs:element name="description" type="xs:token"
            minOccurs="0"/>
          <xs:element name="interface" type="vr:Interface"
            minOccurs="0" maxOccurs="unbounded"/>
        </xs:sequence>
        <xs:attribute name="standardID" type="vr:IdentifierURI"
          use="required" fixed="ivo://ivoa.net/std/SLAP"/>
      </xs:restriction>
    </xs:complexContent>
  </xs:complexType>

```

```

        </xs:restriction>
    </xs:complexContent>
</xs:complexType>

<!-- SLAP Capabilities -->
<xs:complexType name="SimpleLineAccess">
    <xs:annotation>
        <xs:documentation>
            The capabilities of an SLAP service implementation.
        </xs:documentation>
    </xs:annotation>

    <xs:complexContent>
        <xs:extension base="slap:SLAPCapRestriction">
            <xs:sequence>

                <xs:element name="complianceLevel" type="slap:ComplianceLevel">
                    <xs:annotation>
                        <xs:documentation>
                            The category indicating the level to which this
                            service instance complies with the SLAP standard.
                        </xs:documentation>
                        <xs:documentation>
                            Allowed values are "minimal" and "full".
                            See definitions of allowed values for details.
                        </xs:documentation>
                    </xs:annotation>
                </xs:element>

                <xs:element name="dataSource" type="slap:DataSource">
                    <xs:annotation>
                        <xs:documentation>
                            The category specifying where the data accessed by
                            the service originally came from.
                        </xs:documentation>
                        <xs:documentation>
                            Allowed values are "observational/astrophysical",
                            "observational/laboratory", "theoretical"
                        </xs:documentation>
                    </xs:annotation>
                </xs:element>

                <xs:element name="maxRecords" type="xs:int">
                    <xs:annotation>
                        <xs:documentation>
                            The hard limit on the largest number of records that
                            the query operation will return in a single response.
                        </xs:documentation>
                        <xs:documentation>
                            If not specified there is no predefined hard limit on
                            the number of records in a query response.
                        </xs:documentation>
                    </xs:annotation>
                </xs:element>

                <xs:element name="testQuery" type="slap:Query"
                    minOccurs="0" maxOccurs="1">
                    <xs:annotation>
                        <xs:documentation>
                            A set of queryData parameters that is expected to
                            produce at least one matched record which can be
                            used to test the service.
                        </xs:documentation>
                    </xs:annotation>
                </xs:element>
            </xs:sequence>
        </xs:extension>
    </xs:complexContent>
</xs:complexType>

```

```

        <xs:documentation>
            The value should include all parameters required
            for the test query but should exclude the baseURL
            and the REQUEST parameter.
        </xs:documentation>
    </xs:annotation>
</xs:element>

    </xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>

<xs:simpleType name="ComplianceLevel">
    <xs:annotation>
        <xs:documentation>
            The allowed values for indicating the level at which a service
            instance complies with the SLAP standard.
        </xs:documentation>
    </xs:annotation>

    <xs:restriction base="xs:token">
        <xs:enumeration value="minimal">
            <xs:annotation>
                <xs:documentation>
                    The service supports all of the capabilities and features
                    of the SLAP protocol identified as "must" in the
                    specification.
                </xs:documentation>
                <xs:documentation>
                    In brief, this includes:
                    * implementing the GET interface,
                    * WAVELENGTH, REQUEST for input query,
                    * sslm:Line.wavelength.value and sslm:Line.title for output
                    fields
                    * supports the "FORMAT=METADATA" metadata query.
                </xs:documentation>
            </xs:annotation>
        </xs:enumeration>

        <xs:enumeration value="full">
            <xs:annotation>
                <xs:documentation>
                    The service supports, at a minimum, all of the capabilities
                    and features of the SLAP protocol identified as "must" or
                    "should" in the specification.
                </xs:documentation>
            </xs:annotation>
        </xs:enumeration>
    </xs:restriction>
</xs:simpleType>

<xs:simpleType name="DataSource">
    <xs:annotation>
        <xs:documentation>
            The defined categories that specify where the line data
            originally came from, i.e., the type of data collections to
            which the service provides access.
        </xs:documentation>
    </xs:annotation>

    <xs:restriction base="xs:string">
        <xs:enumeration value="observational/astrophysical">

```

```

        <xs:annotation>
            <xs:documentation>
                Lines observed and identified in real spectra of
                astrophysical observations by different
                instrument/projects
            </xs:documentation>
        </xs:annotation>
    </xs:enumeration>

    <xs:enumeration value="observational/laboratory">
        <xs:annotation>
            <xs:documentation>
                Lines observed and identified in real spectra of
                laboratory measurements
            </xs:documentation>
        </xs:annotation>
    </xs:enumeration>

    <xs:enumeration value="theoretical">
        <xs:annotation>
            <xs:documentation>
                Servers containing theoretical spectral lines
            </xs:documentation>
        </xs:annotation>
    </xs:enumeration>

</xs:restriction>
</xs:simpleType>

<xs:complexType name="Query">
    <xs:annotation>
        <xs:documentation>
            A query to be sent to the service, e.g., a test query.
        </xs:documentation>
    </xs:annotation>

    <xs:sequence>
        <xs:element name="wavelength" type="slap:WavelengthRange" minOccurs="0">
            <xs:annotation>
                <xs:documentation>
                    Spectral range in meters to be used to constrain the query
                    of spectral lines.
                </xs:documentation>
            </xs:annotation>
        </xs:element>

        <xs:element name="queryDataCmd" type="xs:string" minOccurs="0">
            <xs:annotation>
                <xs:documentation>
                    Fully specified queryData test query formatted as an URL
                    argument list in the syntax specified by the SLAP standard.
                    The list must exclude the REQUEST argument which is
                    assumed to be set to "queryData". VERSION may be
                    included if the test query applies to a specific version
                    of the service protocol.
                </xs:documentation>
                <xs:documentation>
                    If queryDataCmd is used to form a query, the default
                    value of WAVELENGTH specified above is not
                    used; if the test query requires WAVELENGTH it
                    should be included directly in queryDataCmd.
                </xs:documentation>
            </xs:annotation>
        </xs:element>
    </xs:sequence>
</xs:complexType>

```

```

        This value must be a string in the form of name=value
        pairs delimited with ampersands (&). A query may
        then be formed by appending to the baseURL the request
        argument, "REQUEST=queryData&", followed by the
        contents of this element.
    </xs:documentation>
</xs:annotation>
</xs:element>
</xs:sequence>
</xs:complexType>

<xs:complexType name="WavelengthRange">
  <xs:annotation>
    <xs:documentation>
      Spectral range in meters to be used to constrain the query
      of spectral lines
    </xs:documentation>
  </xs:annotation>

  <xs:sequence>
    <xs:element name="minWavelength" type="xs:double" minOccurs="0">
      <xs:annotation>
        <xs:documentation>
          Minimum wavelength in meters to be used to constrain the query
          of spectral lines
        </xs:documentation>
      </xs:annotation>
    </xs:element>

    <xs:element name="maxWavelength" type="xs:double" minOccurs="0">
      <xs:annotation>
        <xs:documentation>
          Maximum wavelength in meters to be used to constrain the query
          of spectral lines
        </xs:documentation>
      </xs:annotation>
    </xs:element>
  </xs:sequence>
</xs:complexType>
</xs:schema>

```

Appendix B: Supporting Multiple Versions of DAL Protocols

Note: this section is non-normative.

It is possible for a VOResource-encoded resource description to indicate support for multiple versions of standard service. This is described generally in Section 2.2.2 ("The Service Data Model") of the VOResource specification [VOR]. In that section, the specification says that a `<capability>` element can contain multiple `<interface>` elements, each describing a different version. In this appendix, we illustrate how this can be applied to the DAL services covered by this (SimpleDALRegExt) specification.

We start by noting that the `standardID` values for each of the DAL protocols described in this document refer to the standards generally, without reference to the particular version. For example, the IVOA identifier for the Simple Cone Search protocol is `ivo://ivoa.net/std/ConeSearch`. Thus a `<capability>` element can logically describe support for any version or multiple versions of the standard DAL protocol as long as the extension schema for that protocol is same for all of the versions.

Here is an example a service that supports two versions of the SSA protocol:

Example

Supporting multiple versions of the SSA standard. Below shows just the `<capability>` element of a description of an SSA service resource.

```
<capability xsi:type="ssap:SimpleSpectralAccess" standardID="ivo://ivoa.net/std/SSA">

  <description>
    This service supports the SSA protocol standard. Currently, there is
    support for both 1.04 and 1.1 versions of the spec. A browser-based
    front-end is also available.
  </description>

  <!--
  - this gives the base URL for the standard GET interface, version 1.1
  -->
  <interface xsi:type="vs:ParamHTTP" role="std" version="1.1">
    <accessURL use="base">
      http://adil.ncsa.uiuc.edu/cgi-bin/vossall
    </accessURL>
  </interface>

  <!--
  - this gives the base URL for the standard GET interface, version 1.04
  -->
  <interface xsi:type="vs:ParamHTTP" role="std" version="1.04">
    <accessURL use="base">
      http://adil.ncsa.uiuc.edu/cgi-bin/vossa
    </accessURL>
  </interface>

  <!--
  - Here's an interactive version. Since it's just a front-end to
  - the GET service, it shares the same capability metadata.
  - This element does not have a version attribute nor is role="std"
  - set, since it is not part of the standard.
  -->
  <interface xsi:type="vr:WebBrowser">
    <accessURL> http://adil.ncsa.uiuc.edu/ws/vossa </accessURL>
  </interface>

  <!--
  - This starts the SSA-specific metadata
  -->
  <complianceLevel>full</complianceLevel>
  <dataSource>pointed</dataSource>
  <creationType>cutout</creationType>
  <maxSearchRadius>10</maxSearchRadius>
  <maxRecords>10000</maxRecords>
  <defaultMaxRecords>500</defaultMaxRecords>
  <maxAperture>3600</maxAperture>

</capability>
```

In the above example, two different SSA service endpoints are supported, each compliant with a different version of the SSA standard. The `version` attribute on the `<interface>` elements indicate which version the endpoint supports. Note that if a `version` attribute is not provided, it defaults to "1.0". The `role="std"` distinguishes standard-complying interfaces from custom ones; in the example above, an endpoint to a browser-based front-end is provided as well.

A consumer that wishes to engage a standard DAL service, should extract interface descriptions where `role="std"` is set. From of those, the consumer should inspect the `version` attribute to select a version that it supports.

Often, the difference between versions is of little consequence to a consumer, so having to choose between several standardized versions is an unneeded complication. Thus, it is recommended that publishers list the most preferred version for users (typically the latest) first among the list of interfaces; consequently, consumers that do not care to attempt to interpret the version attribute should choose the first in the list. If the service query fails (because the consumer's assumptions about the service protocol are not applicable to that version of the service), the consumer may try the next one in the list.

Appendix C: Change History

- Now recommend `ssap` as prefix; changed all occurrences of `ssa` in text and schema.
- added `<supportedFrame>` to `ssap:SimpleSpectralAccess`
- removed import of `VODataService` schema from SIA, SSA, and Conesearch schemas.
- change base type of controlled vocab types from `xs:string` to `xs:token` for consistency with `VOResource`.

References

[RFC 2119]

Bradner, S. 1997. [Key words for use in RFCs to Indicate Requirement Levels](http://www.ietf.org/rfc/rfc2119.txt), IETF RFC 2119, <http://www.ietf.org/rfc/rfc2119.txt>

[schema]

Fallside, David C., Walmsley, Priscilla (editors) 2004, [XML Schema Part 0: Primer Second Edition](http://www.w3.org/TR/xmlschema-0/), W3C Recommendation 28 October 2004, <http://www.w3.org/TR/xmlschema-0/>

[Arch]

Arviset, Christophe and the IVOA Technical Coordination Group 2010, *The IVOA in 2010: Technical Assessment and Roadmap*, v1.0, IVOA Note, in preparation.

[SCS]

Williams, R., Hanisch, R., Szalay, A., and Plante, R. 2008, [Simple Cone Search Version 1.03](http://www.ivoa.net/Documents/REC/DAL/ConeSearch-20080222.html), IVOA Recommendation, 22 February 2008, <http://www.ivoa.net/Documents/REC/DAL/ConeSearch-20080222.html>.

[SIA]

Tody, D. and Plante, R. 2004, [Simple Image Access Specification Version 1.0](http://www.ivoa.net/Documents/WD/SIA/sia-20040524.html), IVOA Working Draft, <http://www.ivoa.net/Documents/WD/SIA/sia-20040524.html>.

[SSA]

Tody, D., Dolensky, M., McDowell, J., Bonnarel, F., Budavari, T., Busko, I., Micol, A., Osuna, P., Salgado, J., Skoda, P., Thompson, R., and Valdes, F. 2008, [Simple Spectral Access Protocol Version 1.04](http://www.ivoa.net/Documents/cover/SSA-20080201.html), IVOA Recommendation, 01 February 2008, <http://www.ivoa.net/Documents/cover/SSA-20080201.html>.

[SLA]

Salgado, J., Osuna, P., Guainazzi, M., Barbarisi, I., Dubernet, M., and Tody, D. 2010, [Simple Line Access Protocol Version 1.0](http://www.ivoa.net/Documents/SLAP/20101209/), IVOA Recommendation, 9 December 2010, <http://www.ivoa.net/Documents/SLAP/20101209/>.

[RI]

Benson, Kevin, Plante, Ray, Auden, Elizabeth, Graham, Matthew, Greene, Gretchen, Hill, Martin, Linde, Tony, Morris, Dave, O'Mullane, Wil, Rixon, Guy, Andrews, Kona 2008, [IVOA Registry Interfaces](http://www.ivoa.net/Documents/latest/ResourceInterface.html), v1.02, IVOA Recommendation, <http://www.ivoa.net/Documents/latest/ResourceInterface.html>

[RM]

Hanisch, Robert (ed.) 2004. [Resource Metadata for the Virtual Observatory, Version 1.12](http://www.ivoa.net/Documents/REC/ResMetadata/RM-20040426.htm), IVOA Recommendation, <http://www.ivoa.net/Documents/REC/ResMetadata/RM-20040426.htm>

[VOR]

Plante, R., Benson, K., Graham, M., Greene, G., Harrison, P., Lemson, G., Linde, T., Rixon, G., Stébé, A. 2008, [VOResource: an XML Encoding Schema for Resource Metadata](http://www.ivoa.net/Documents/REC/ReR/VOResource-20080222.html), v1.03, IVOA Recommendation, <http://www.ivoa.net/Documents/REC/ReR/VOResource-20080222.html>

[VDS]

Plante, R., Stébé, A. Benson, K., Dowler, P. Graham, M., Greene, G., Harrison, P., Lemson, G., Linde, T., Rixon, G., Stébé, A. 2009, [VODataService: a VOResource Schema Extension for Describing Collections and Services](http://www.ivoa.net/Documents/VODataService/20101202/), v1.1, IVOA Recommendation, <http://www.ivoa.net/Documents/VODataService/20101202/>

[STC]

Rots, Arnold 2007, [Space-Time Coordinate Metadata for the Virtual Observatory](http://www.ivoa.net/Documents/REC/STC/STC-20071030.html), v1.33, IVOA Recommendation, [href="http://www.ivoa.net/Documents/REC/STC/STC-20071030.html">](http://www.ivoa.net/Documents/REC/STC/STC-20071030.html)